




Outline Drawing

客户确认签名
Customer approved



日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2019/05/08	LIU
B			
C			

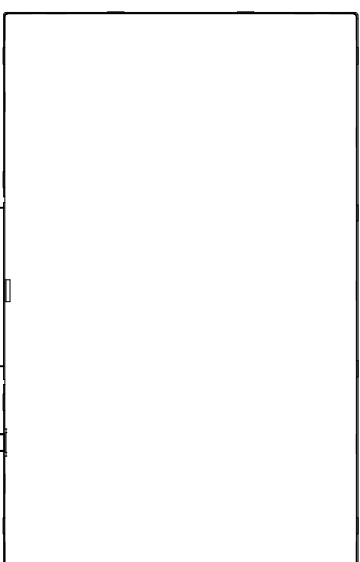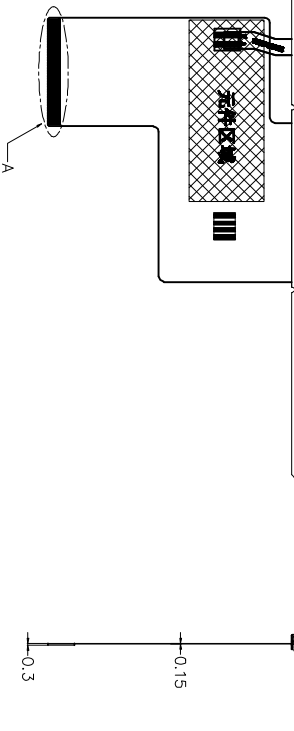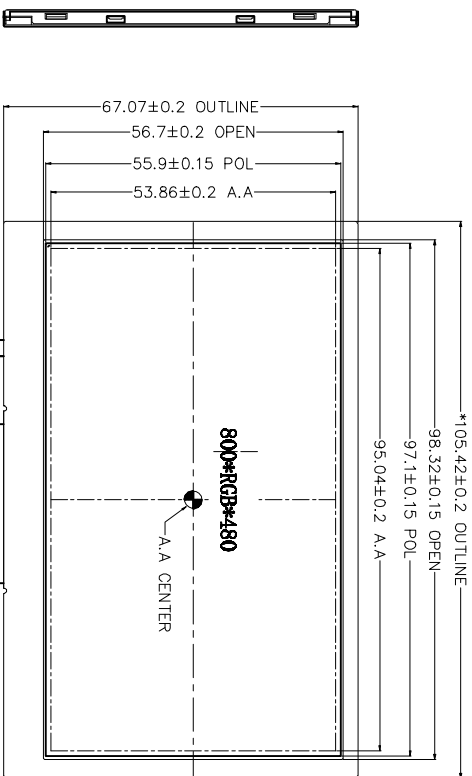

PIN	NAME
1	LED K
2	LED A
3	LED A
4	GND
5	VDD
6	R0
7	R1
8	R2
9	R3
10	R4
11	R5
12	R6
13	R7
14	G0
15	G1
16	G2
17	G3
18	G4
19	G5
20	G6
21	G7
22	B0
23	B1
24	B2
25	B3
26	B4
27	B5
28	B6
29	B7
30	GND
31	DC/CLK
32	NC
33	HSYNC
34	VS/CLK
35	NC
36	NC
37	X1
38	X2
39	X1
40	X2

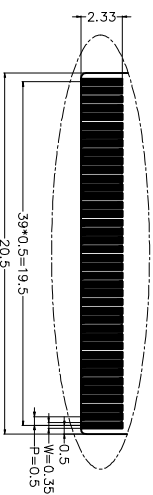

DETAIL A (4:1)

- NOTE
- 1.Lcd Display Type: 4.3" TFT, 800*480, IPS
 - 2.Polarizer Mode: Transmissive, normally black
 - 3.Viewing Direction: ALL
 - 4.Logic Supply Voltage: 3.0V
 - 5.Control IC: SCT283
 - 6.Backlight: White(4*3 Led), ILed=60Ma, Vled=12.0V
 - 7.Backlight brightness and uniformity: 500cd/m2, >=80%
 - 8.Operating Temp:-20 TO 70°C
 - 9.Storage Temp: -30 TO 80°C
 - 10.Connector: FPC
 - 11.Ulteriorly Tolerance: ±0.2MM

PIN	NAME
1	GND
2	SDA
3	SCL
4	VDD
5	INT
6	RST

深圳市集目显示技术有限公司
 Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
 4.3" TFT
 Material No.

Dwg:	CUSTOMER		SCALE: 1:1
Check:	MODULE	LMT043EIW40R03	SHEET 1 OF 1
Visual Angle			