



Outline Drawing

客户确认签名
Customer approved


日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2019/12/17	L1
B			
C			

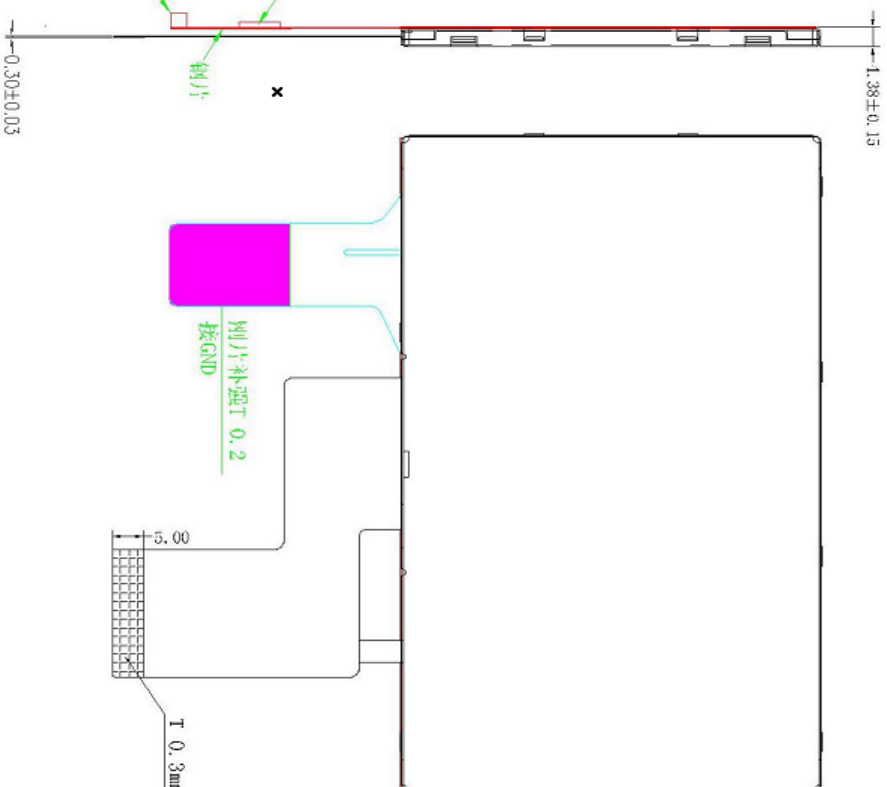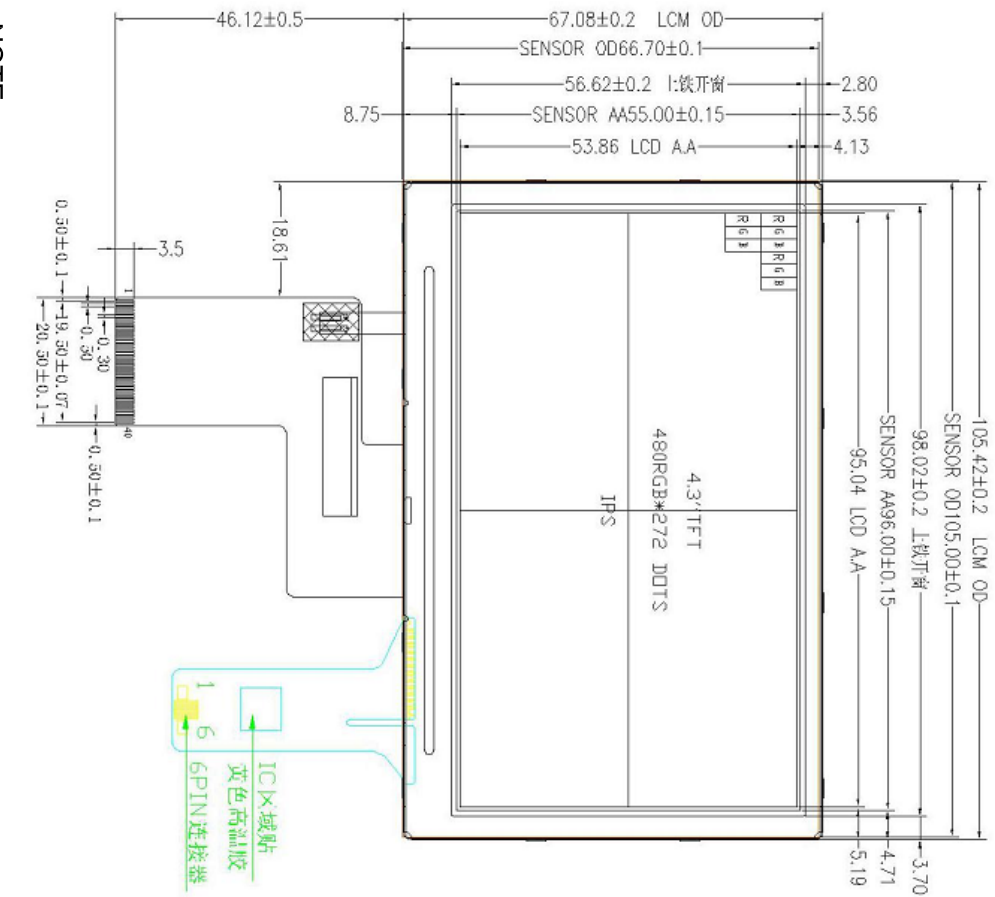

PIN	NAME
1	LED K
2	LED A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DC/CK
31	DISP
32	HSYNC
33	VSYNC
34	DE/N
35	SHLR
36	UPDN
37	NC
38	NC
39	NC
39	NC



- NOTE**
1. Lcd Display Type: 4.3" TFT+CTP, 480*272, IPS(BOE)
 2. Polarizer Mode: Transmissive, normally white
 3. Viewing Direction: ALL
 4. Logic Supply Voltage: 3.0V
 5. Control IC: SCT283
 6. Backlight: White(8*2 Led), ILed=40Ma, Vled=24.0V
 7. Backlight brightness and uniformity: 1000cd/m2, >=80%
 8. Operating Temp: -30 TO 80°C
 9. Storage Temp: -30 TO 85°C
 10. Connector: FPC
 11. Ulteriorly Tolerance: ±0.2MM

PIN	NAME
1	RST
2	VDD
3	GND
4	INT
5	SDA
6	SCL

深圳市集目显示技术有限公司

Shenzhen Eagle Vision Display Technology Co., Ltd


LCM TYPE
4.3" TFT+CTP
Material No.

Dwg: CUSTOMER

Check: MODULE

SCALE: 1:1

Visual Angle



SHEET 1 OF 1