




Outline Drawing

客户确认签名
Customer approved


日期
Date



VER	REVISION	RECORD	Date	Name
A	NEW	RELEASE	2017/06/09	Song
B				
C				

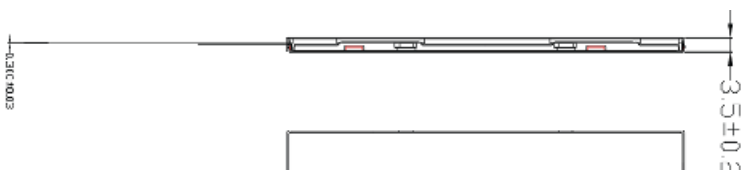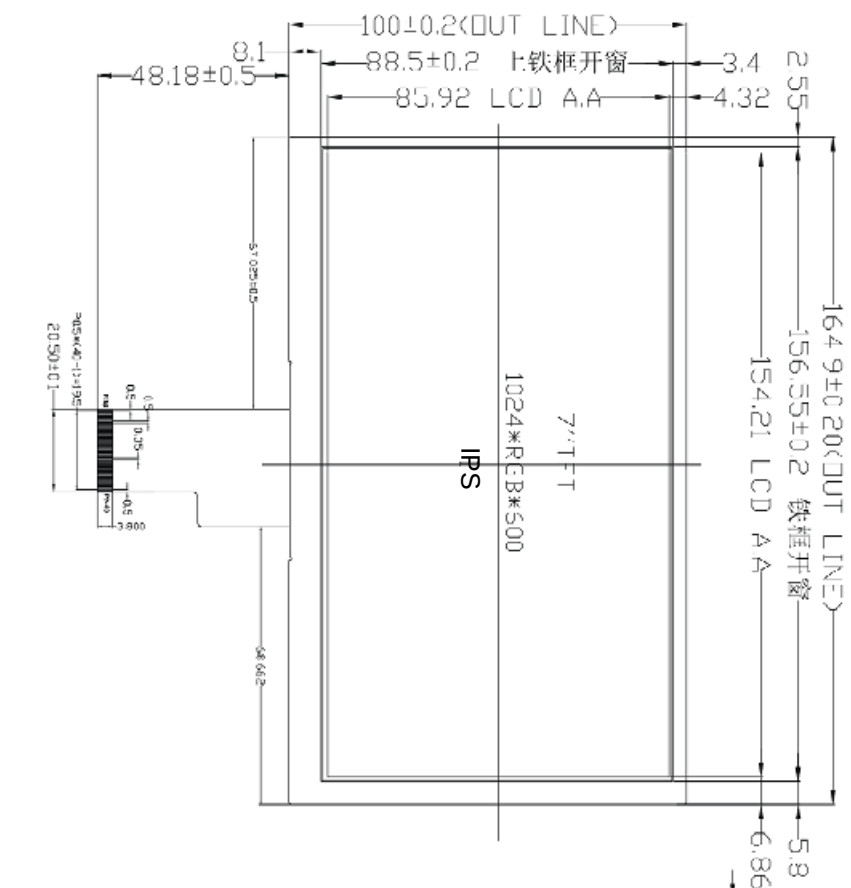

PIN	NAME
1	VCOM
2	VDD
3	VDD
4	NC
5	REST
6	STBYB
7	GND
8	RX1N0-
9	RX1N0+
10	GND
11	RX1N1-
12	RX1N1+
13	GND
14	RX1N2-
15	RX1N2+
16	GND
17	RX1K1-
18	RX1K1+
19	GND
20	RX1N3-
21	RX1N3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DTMO
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	GND
37	GND
38	VGH
39	LED+
40	LED+



NOTE

- 1.Lcd Display Type: 7.0TFT, 1024*600, IPS
- 2.Polarzier Mode: Transmissive, normally white
- 3.Viewing Direction: ALL
- 4.Logic Supply Voltage: 3.0V
- 5.Control IC:
- 6.Backlight: White(7*3 Led), ILed=140Ma, Vled=10.0V
- 7.Backlight brightness and uniformity: 250cd/m2, >=80%
- 8.Operating Temp:-20 TO 70℃
- 9.Storage Temp: -30 TO 80℃
- 10.Connector: FPC
- 11.Uteriorly Tolerance: ±0.2MM

深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
7.0 In TFT

Material No.

Dwg:

Check:

CUSTOMER

MODULE

Visual Angle

LMT070A1W40L01

SCALE: 1:1

SHEET 1 OF 1