



Outline Drawing

客户确认签名
Customer approved

日期
Date




VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2017/01/08	YANG
B			
C			

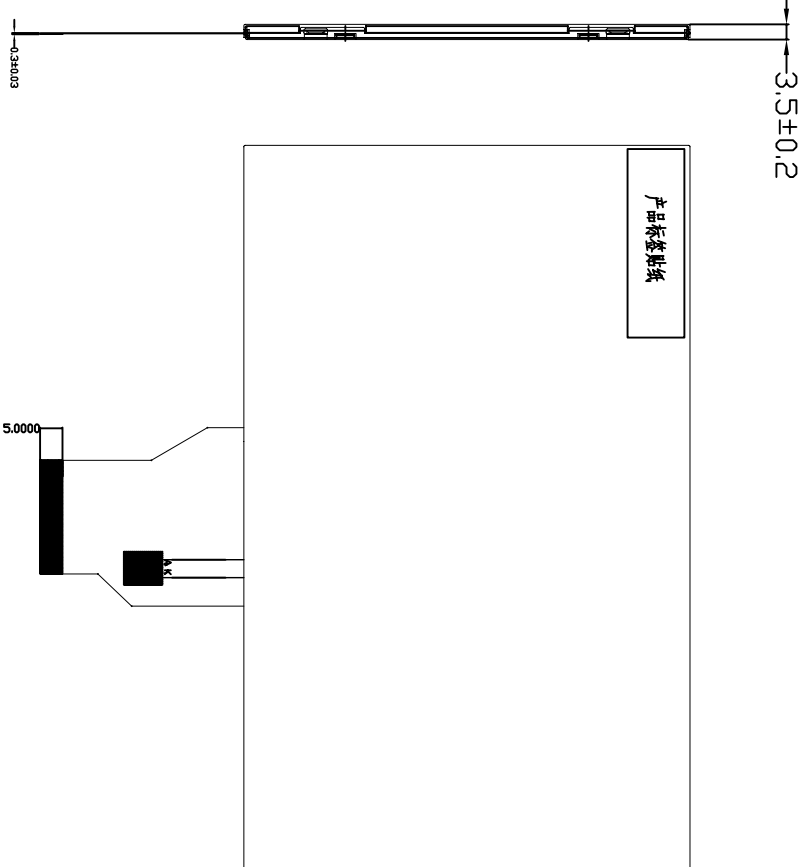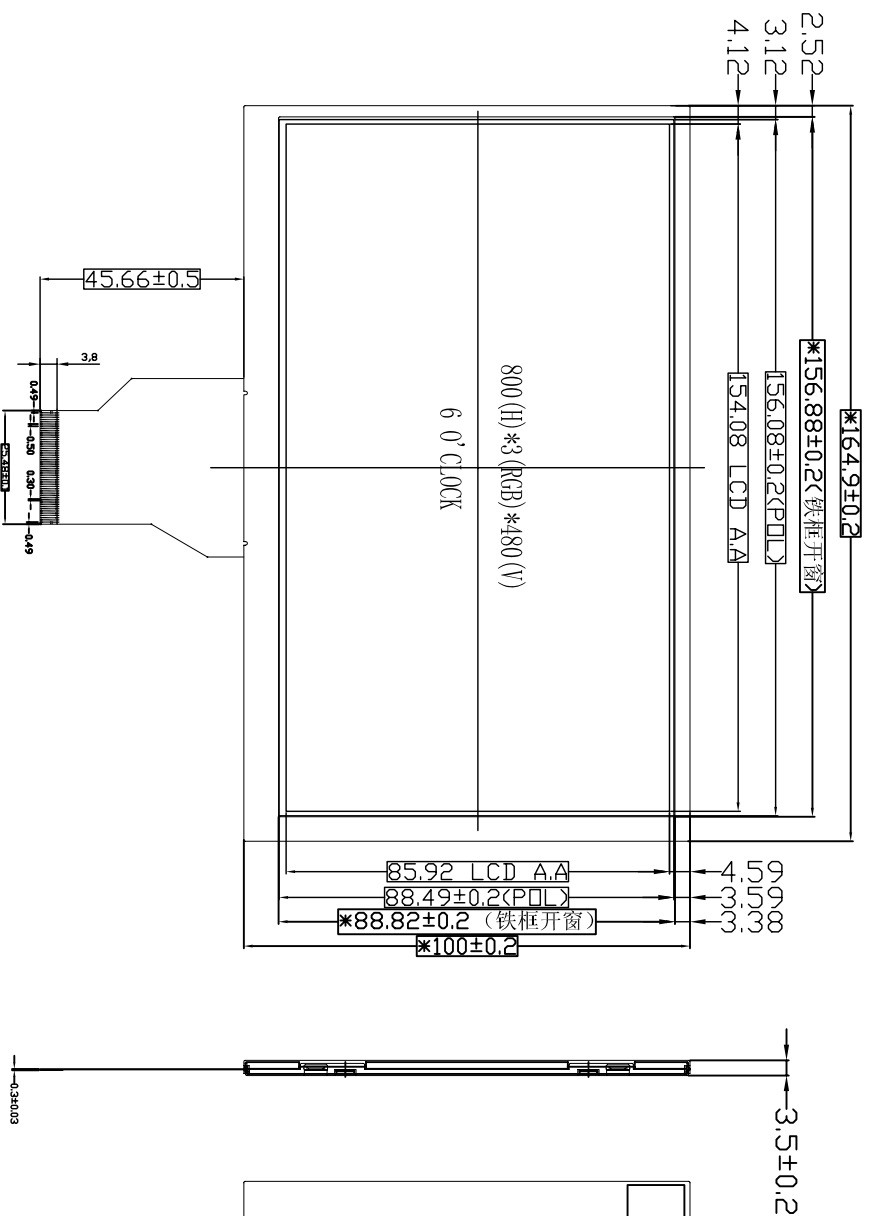

P/N	NAME
1	LED +
2	LED -
3	LED -
4	LED -
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VSD
11	HSB
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	I/O
40	I/O
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DTMBS
48	GND
49	NC
50	NC

NOTE

- 1.Lcd Display Type: 7.0" TFT, 800*480, TN
- 2.Polarzier Mode: Transmissive, normally white
- 3.Viewing Direction: 60°CLOCK
- 4.Logic Supply Voltage: 3.0V
- 5.Control IC:
- 6.Backlight: White(9*3 Led), ILed=180Ma, Vled=10.0V
- 7.Backlight brightness and uniformity: 800cd/m2,>80%
- 8.Operating Temp:-20 TO 70°C
- 9.Storage Temp: -30 TO 80°C
- 10.Connector: FPC
- 11.Ultieriorly Tolerance:±0.2MM



 E.V.T Shenzhen Eagle Vision Display Technology Co., Ltd	深圳市隼目显示技术有限公司		LCM TYPE
			7.0" TFT
Dwg:		CUSTOMER	Material No.
Check:		MODULE	SCALE: 1:1
Dim:		Visual Angle	SHEET 1 OF 1