


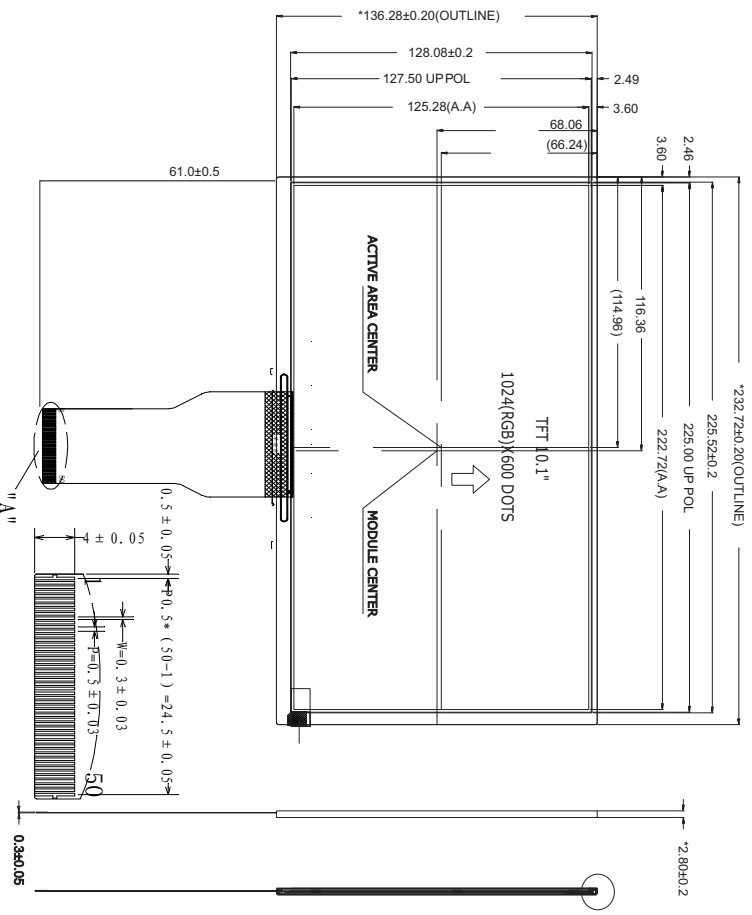


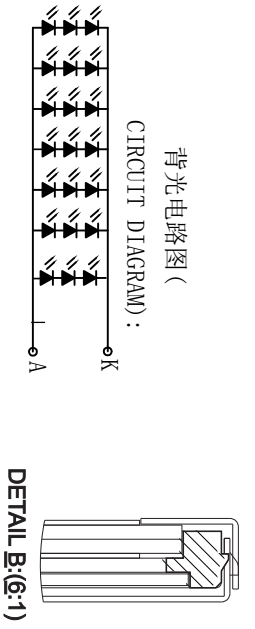

VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2018/03/22	CGP
B			
C			

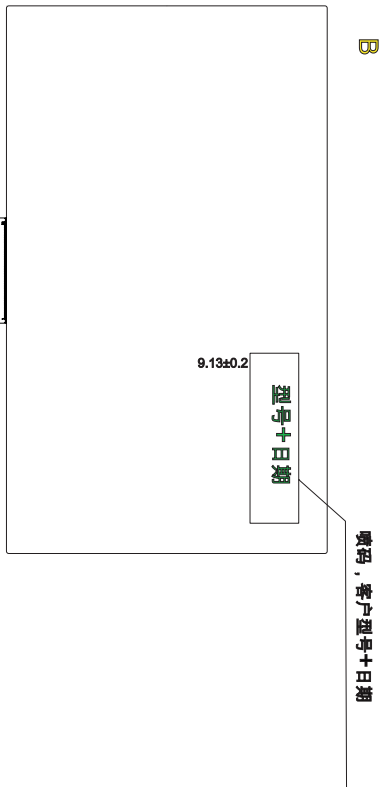

DETAIL "A" (3:1) Section A-A



PIN	NAME
1	LED +
2	LED +
3	LED -
3	LED -
4	LED -
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VSYNC
11	HSYNC
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	CLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RSET
45	NC
46	VCOM
47	DTHB
48	GND
49	NC
50	NC

- NOTE**
- Lcd Display Type: 10.1" TFT, 1024*600, TN
 - Polarizer Mode: Transmissive, normally BLACK
 - Viewing Direction: 6 O'CLOCK
 - Logic Supply Voltage: 3.0V
 - Control IC: HX8282A02&HX8696
 - Backlight: White (7*3 LED), Iled=140mA, Vled=9.6V
 - Backlight brightness and uniformity: 180cd/m2, >=80%
 - Operating Temp: -10 TO 60°C
 - Storage Temp: -20 TO 70°C
 - Connector: FPC
 - Ultiorly Tolerance: ±0.2MM

深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

Dwg:	CUSTOMER		LCM TYPE
Check:	MODULE	LMT101FTN50R01	10.1" TFT
Visual Angle			Material No.
			SCALE: 1:1
			SHEET 1 OF 1

keseboun 教育版产品制作