



Outline Drawing

客户确认签名
Customer approved

日期
Date




VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2016/10/22	ZW
B			
C			

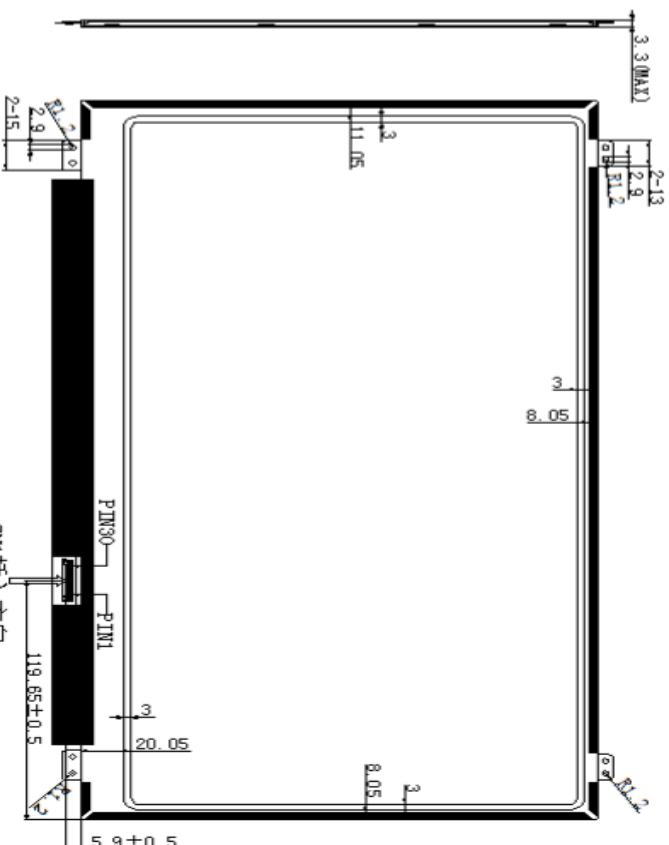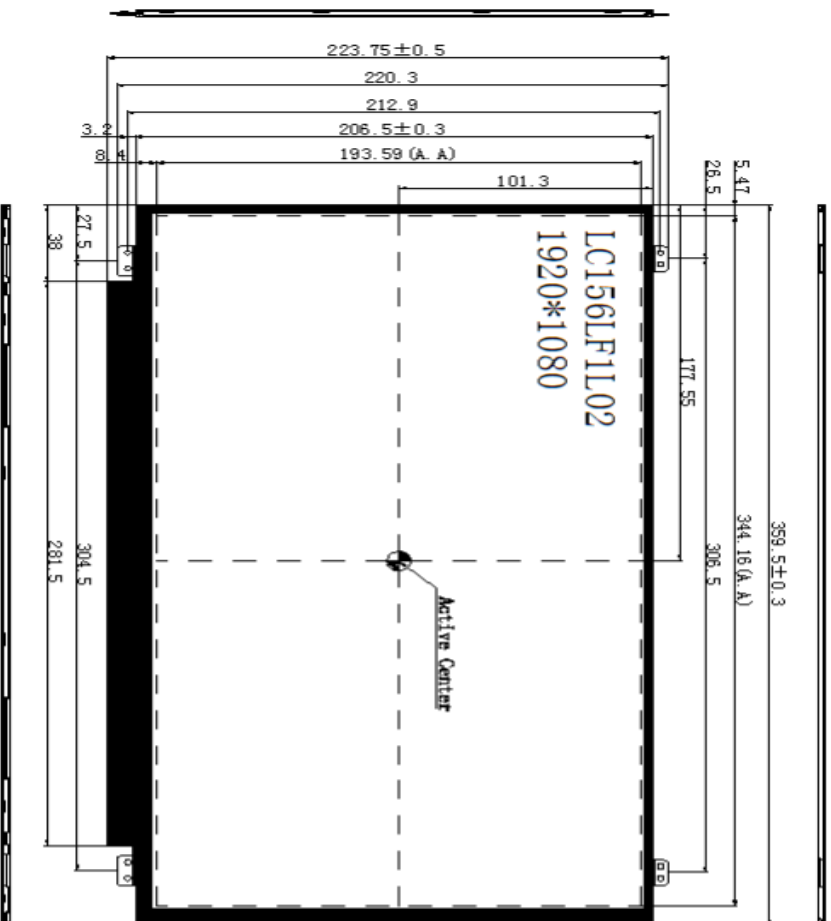

PIN	NAME
1	NC
2	H GND
3	LAVE1_N
4	LAVE1_P
5	H GND
6	LAVE0_N
7	LAVE0_P
8	H GND
9	AUX_CH_P
10	AUX_CH_N
11	H GND
12	LCD_VDD
13	LCD_VDD
14	NC
15	LCD_GND
16	LCD_GND
17	HPD
18	LED-
19	LED-
20	LED-
21	LED-
22	BL_EN
23	LED_PWM
24	NC
25	NC
26	LED+
27	LED+
28	LED+
29	LED+
30	NC

NOTE

1. Lcd Display Type: 15.6" TFT, 1920*1080
2. Polarizer Mode: Transmissive, normally BLACK
3. Viewing Direction: ALL
4. Logic Supply Voltage: 3.0V
5. Control IC:
6. Backlight: White(4*9 Led), ILed=180mA, Vled=12.4V
7. Backlight brightness and uniformity: 220cd/m2, >=80%
8. Operating Temp: 0 TO 50°C
9. Storage Temp: -20 TO 60°C
10. Connector: FPC
11. Ulteriorly Tolerance: ±0.2MM



深圳市集目显示技术有限公司

Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
13.3" TFT

Dwg: CUSTOMER

Check: MODULE LMT156AIN30E01

Visual Angle

Material No.

SCALE: 1:1

SHEET 1 OF 1