




侧视图

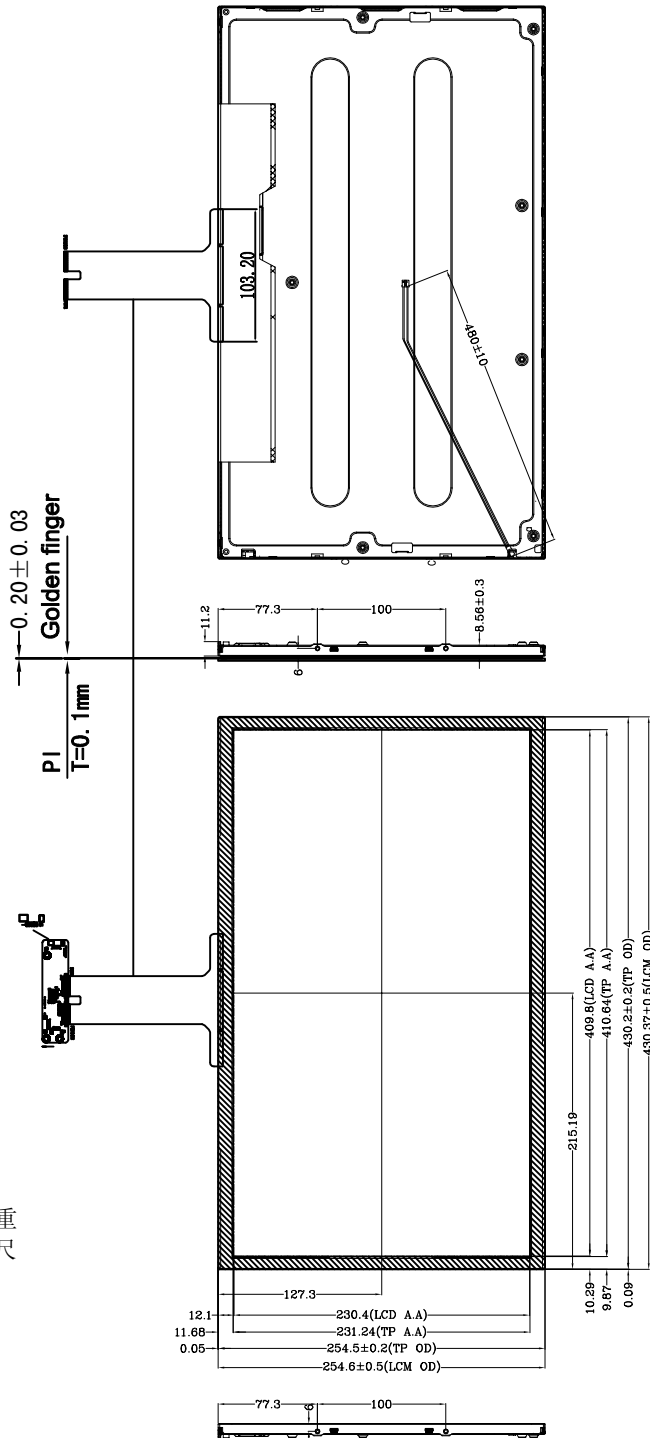



TP技术参数:

- COVER LENS 为钢化玻璃;
- FPC接口线为全出PIN口, 5PIN座子-USB接口;
- IC: ILI2510;
- 接口PIN是0.3*102,
- 表面硬度≥6H; 透光率为86%以上;
- 未注明公差为±0.3mm;
- 产品符合RoHS标准.

USB



	定义
1	GND
2	GNDIN
3	D+
4	D-
5	VDD/5V

备注: 带“☆”为重要尺寸, 重点测量, () 内尺寸为参考尺寸, 不做测量.



ELECTRICAL/OPRICAL CHARACTERISTICS AT Ta=25°C

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	REMARK
Center Luminous Intensity	Iv □ BLU					
	Iv ■ LCM	200	240		cd/m ²	
Backlight coordinaies(B/L)	X					IF=240mA, 4*14=56EA
	Y					
LCM coordinaies	X	0.263	0.293	0.323		
	Y	0.299	0.329	0.359		
Forward Voltage	Vf		42		V	
Luminous Tolerance	Iv-m	75	80		%	(min/max) *100



REV	DATE	REVISER	REVISED DESCRIPTIONS	MODEL NO 产品料号	APPROVED BY 确认	CHECKED BY 审核	DRAWN BY 设计
				T185B30-056-186-0701			
				版本: A0			