



# Outline Drawing

客户确认签名  
Customer approved

日期  
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2019/11/18	zxp
B			
C			

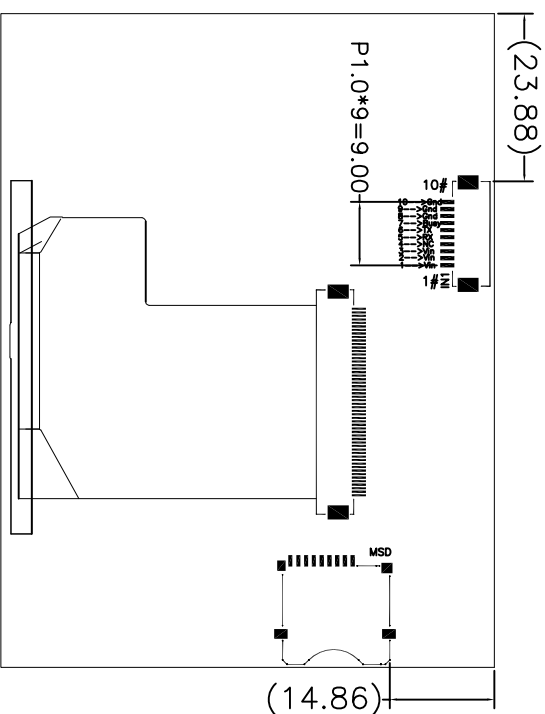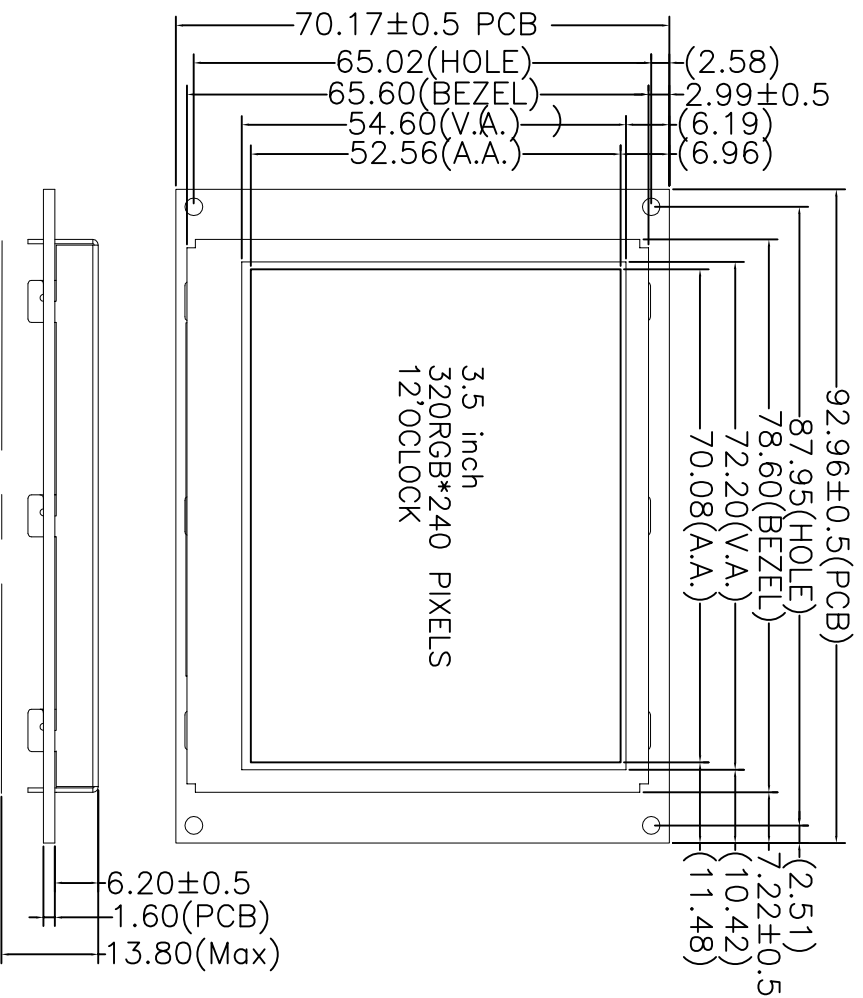

INT:

PIN No.	SYMBOL	Description
1~3	Vin	Power supply input
4	NC	Undefined
5	Rx	RS232 data input
6	Tx	RS232 data output
7	Busy	Busy flog output
8~10	Gnd	Ground

## NOTE

- 1.Lcd Display Type: 3.5' SMART UART TFT LCM, 320\*240
- 2.Polarzier Mode: Transmissive, normally white
- 3.Viewing Direction: 12O'CLOCK
- 4.Logic Supply Voltage: 5.0V
- 5.Control IC:
- 6.Backlight: White
- 7.Backlight brightness and uniformity: 280cd/m2, >=80%
- 8.Operating Temp: -20 TO 70°C
- 9.Storage Temp: -30 TO 80°C
- 10.Connector:
- 11.Ulteriorly Tolerance: ±0.2MM

NO TP: LMT035R10NT01  
CTP: LMT035R10CT01  
RTP: LMT035R10RT01



深圳市集目显示技术有限公司

Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE

3.5吋串口TFT

Material No.

Dwg: CUSTOMER

Check: MODULE LMT035R10NT01

SCALE: 1:1

Visual Angle



SHEET 1 OF 1