



Outline Drawing

客户确认签名
Customer approved

日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2019/12/18	zxp
B			
C			

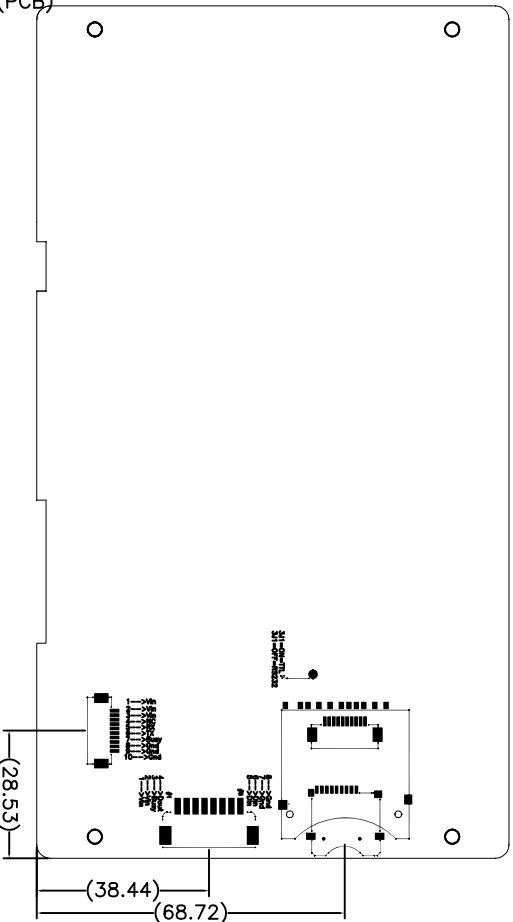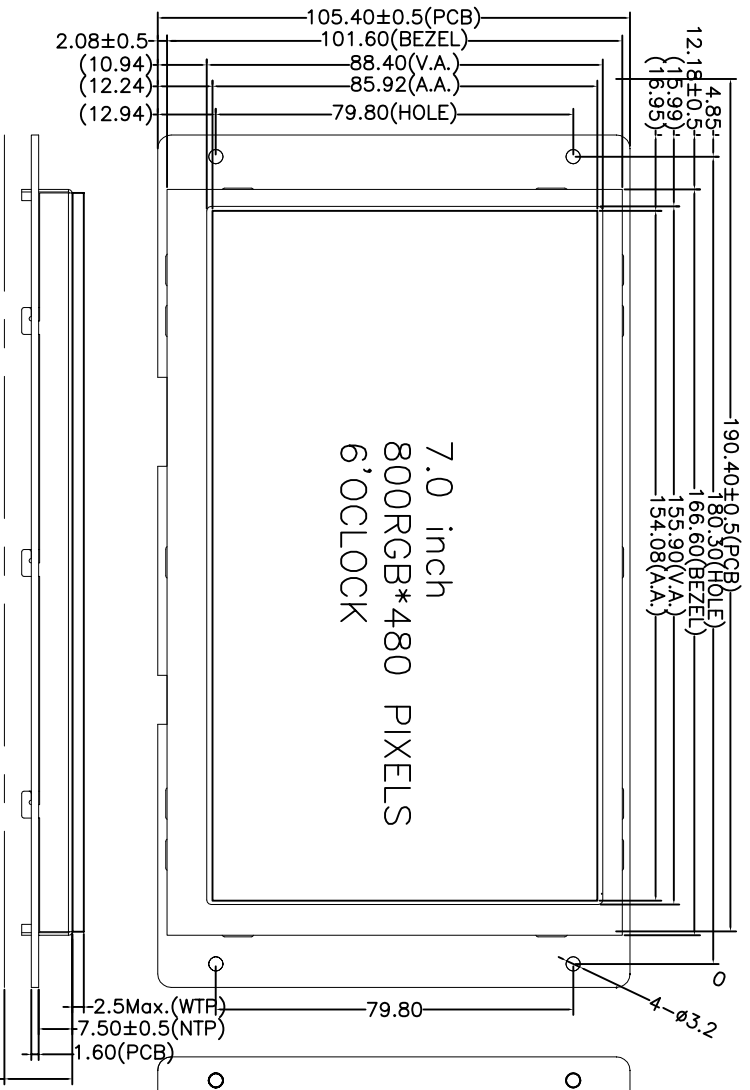

NOTE

- 1.Lcd Display Type: 7.0' SMART UART TFT LCM,800*480
- 2.Polarzier Mode:Transmissive, normally white
- 3.Viewing Direction: 6 O'CLOCK
- 4.Logic Supply Voltage: 5.0V
- 5.Control IC:
- 6.Backlight: White
- 7.Backlight brightness and uniformity: 280cd/m2, >=80%
- 8.Operating Temp: -20 TO 70°C
- 9.Storage Temp: -30 TO 80°C
- 10.Connector:
- 11.Ulteriorly Tolerance:±0.2MM

NO TP: LMT070R10NT01
CTP: LMT070R10CT01
RTP: LMT070R10RT01

INPUT1:		INPUT2:	
PIN No.	SYMBOL	Description	
1~3	Vin	Power supply input	1~2
4	NC	Undefined	3
5	Rx	RS232 data input	4
6	Tx	RS232 data output	5
7	Busy	Busy flag output	6
8~10	Gnd	Ground	7~8
			Gnd

深圳市集目显示技术有限公司

Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
7.0吋 串 口 TFT
Material No.

CUSTOMER

MODULE

Dwg:
Check:

Visual Angle

LMT070R10NT01

SCALE: 1:1



SHEET 1 OF 1