



# Outline Drawing

客户确认签名  
Customer approved



日期  
Date

由 Autodesk 教育版产品制作

VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2019/05/09	LXH
B			
C			

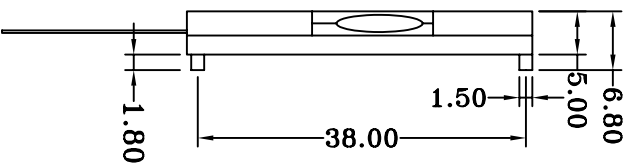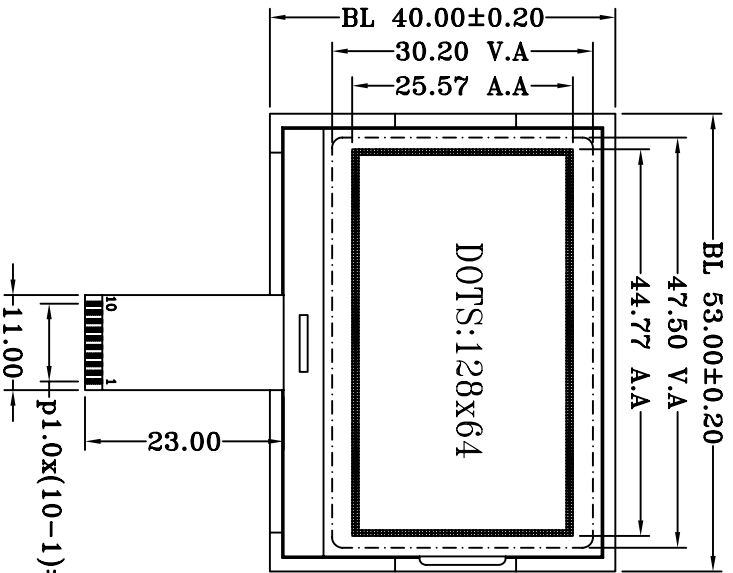

1	CSB
2	RST
3	A0
4	SCL
5	SDI
6	VDD
7	V0
8	XV0
9	VG
10	VSS

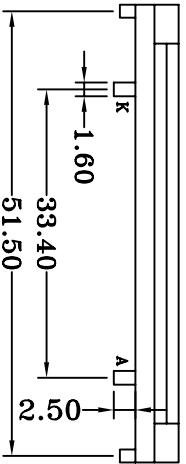

## NOTE

- 1.Lcd Display Type: STN/YG
- 2.Polarzier Mode:Transflective,positive
- 3.Viewing Direction: 6:00
- 4.Drive Method:1/9Bias,1/64Duty
- 5.Logic Supply Voltage: 3.3V
- 6.LCD Driving Voltage: 9.0V
- 7.Operating Temp:-20 TO 70°C
- 8.Storage Temp: -30 TO 80°C
- 9.Control IC: ST7567(COG)
- 10.Backlight: YELLOW-GREEN,1Led=60Ma,Vled=3.0V
- 11.Connector: FPC
- 12.Ulteriorly Tolerance:±0.2MM

深圳市集目显示技术有限公司



Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE

20\*2 CHARACTERS

Material No.

Dwg:

CUSTOMER


Check:

MODULE

LMG12864045YVWYT-A

SCALE: 1:1

Visual Angle



SHEET 1 OF 1