

Outline Drawing



客户确认签名
Customer approved

日期
Date





VER	REVISION	RECORD
A	NEW	RELEASE
B		
C		

VER	REVISION	RECORD	Date	Name
A	NEW	RELEASE	2019/12/06	THF
B				
C				

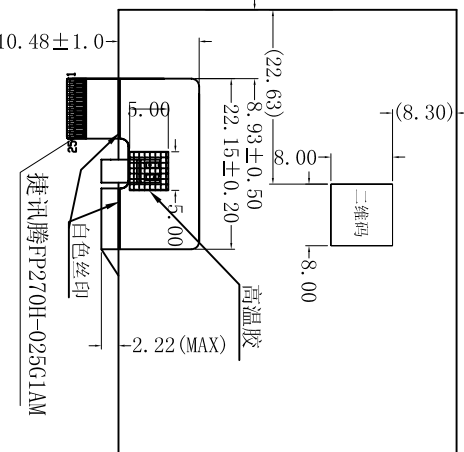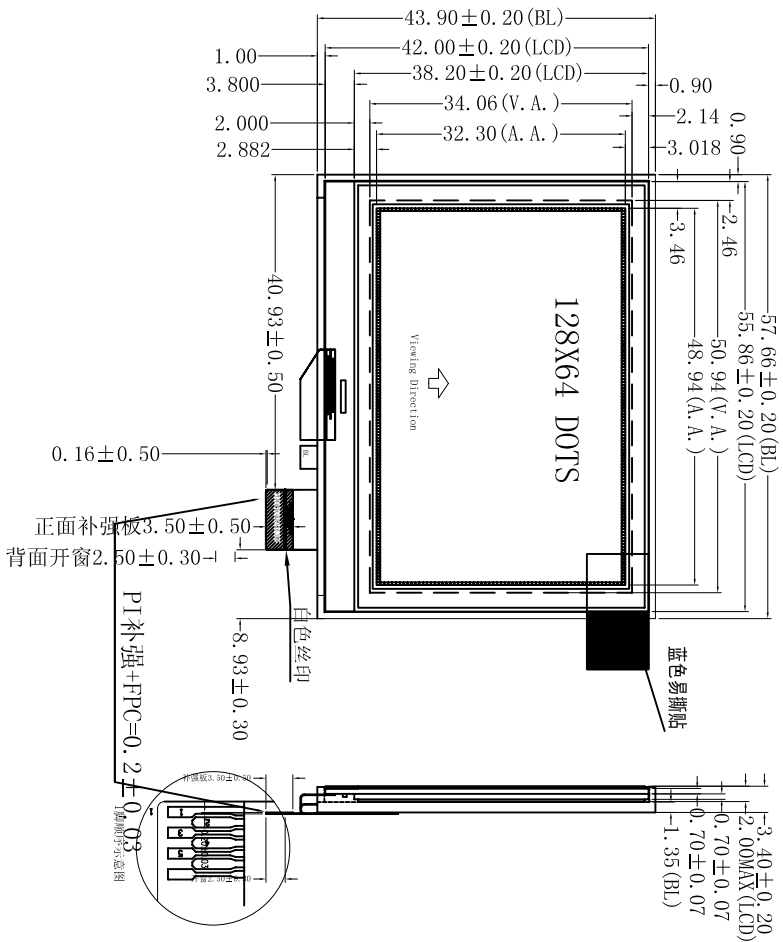

PIN	SYMBOL
1	LED+(A)
2	NC
3	LED-(R)
4	END
5	NC
6	VDD_3.3V
7	NC (LMS)
8	NC (LID)
9	VIO
10	V0
11	VG
12	END
13	RSTB
14	CSB
15	SCL
16	SDA
17	NC
18	NC
19	NC
20	END
21	NC
22	NC
23	NC
24	NC
25	END

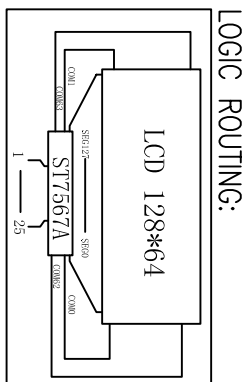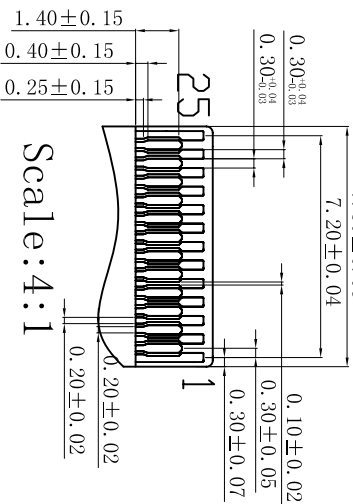

NOTE

- 1.Lcd Display Type: FSTN
- 2.Polarizer Mode: Transflective, positive
- 3.Viewing Direction: 6:00
4. Drive Method: 1/9Bias, 1/65Duty
- 5.Logic Supply Voltage: 3.3V
- 6.LCD Driving Voltage: 9.0V
- 7.Operating Temp: -20 TO 70℃
- 8.Storage Temp: -30 TO 80℃
- 9.Control IC: ST7567A(COG)
- 10.Backlight: White(3*Led), Iled=45mA, Vled=3.0V
- 11.Connector: fpc
- 12.Ultiorly Tolerance:±0.2MM



深圳市隼目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
128*64 DOTS
Material No.

Dwg:	CUSTOMER		
Check:	MODULE	LMG12864055FWWT-A	SCALE: 1:1
Visual Angle			SHEET 1 OF 1