



# Outline Drawing

客户确认签名  
Customer approved

日期  
Date



Autodesk 教育版产品制作

VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2019/03/15	XJH
B			
C			

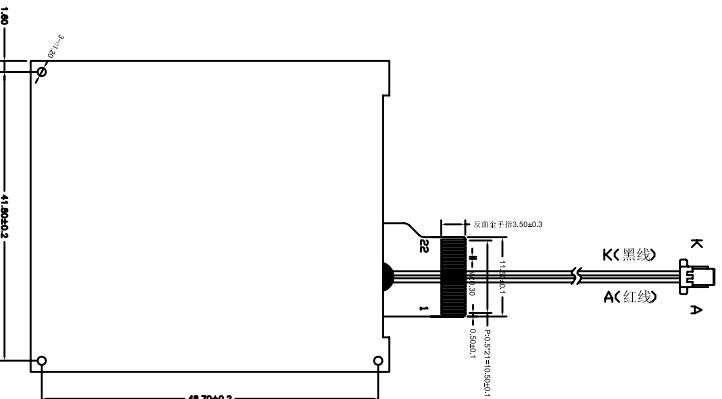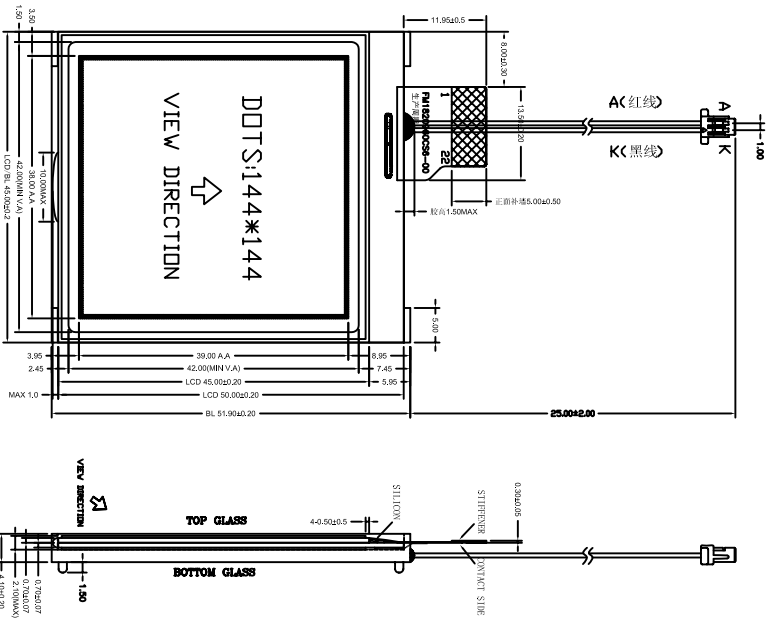

8BIT\SP1\2C	PIN SYMBOL
1	D7
2	D6
3	D5
4	D4
5	D3
6	D2
7	D1
8	D0
9	RST
10	CS0
11	CD
12	WR0
13	WR1
14	BM0
15	BM1
16	VSS
17	VDD
18	VLCD
19	VB0-
20	VB1-
21	VB1+
22	VB0+

10:1



## NOTE

- 1.Lcd Display Type: FSTN
- 2.Polarzier Mode: Transflective, positive
- 3.Viewing Direction: 6:00
- 4.Drive Method: 1/13Bias, 1/144Duty
- 5.Logic Supply Voltage: 3.3V
- 6.LCD Driving Voltage: 15.0V
- 7.Operating Temp:-20 TO 70°C
- 8.Storage Temp: -30 TO 80°C
- 9.Control IC: UC1628(COG)
- 10.Backlight: White(3\*Led), ILed=45Ma, Vled=3.0V
- 11.Connector: FPC
- 12.Ultiorily Tolerance:±0.2MM

深圳市集目显示技术有限公司



Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE  
144\*144 dot

Material No.

Dwg: CUSTOMER

Check: MODULE LMG14414401FWWT-A

SCALE: 1:1

Visual Angle



SHEET 1 OF 1