


Outline Drawing

客户确认签名
Customer approved


日期
Date

由 Autodesk 教育版产品制作

VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2011/08/19	ZDF
B			
C			

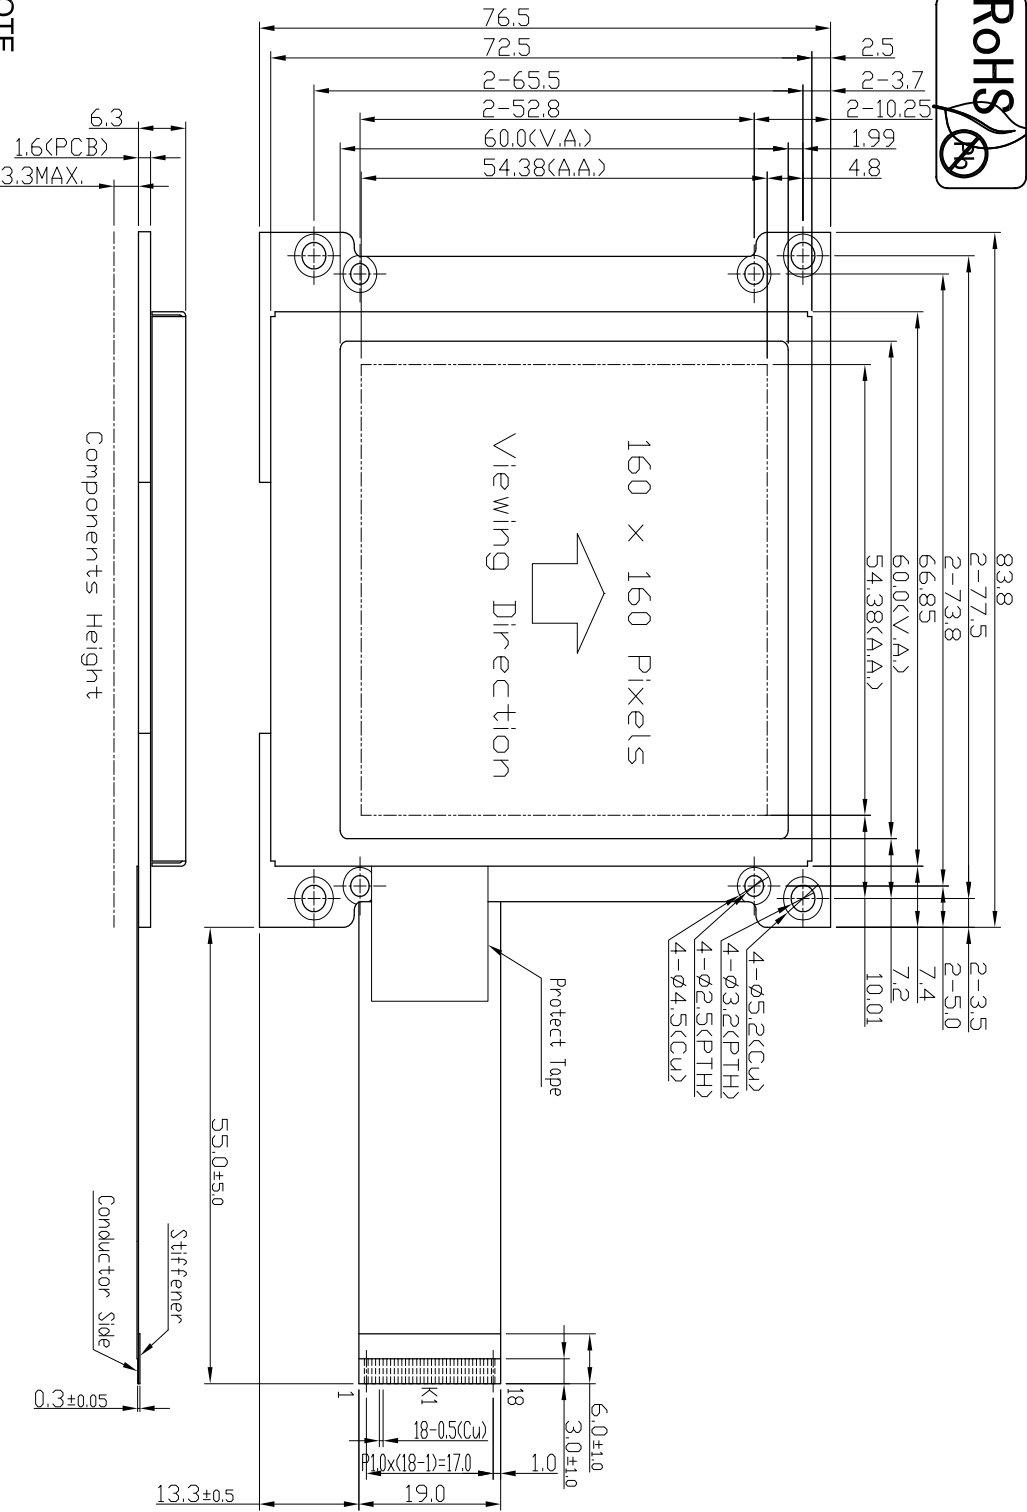

K1 Terminal No.	Pin Name
1	VSS
2	D/C
3	/WR
4	/RD
5	/CS0
6	/RST
7	VDD
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	BLK
17	NC
18	BLA



Pixel Details
Scale=20/1

- NOTE**
- 1.Lcd Display Type: Fstn, Transflective, positive
 2. Viewing Direction: 6:00
 3. Drive Method: 1/110Bias, 1/160Duty
 4. Logic Supply Voltage: 3.0V ;LCD Driving Voltage: 16.5V
 5. Operating Temp: -30 TO 70°C
 6. Storage Temp: -40 TO 70°C
 7. Control IC: UC1698u(COG)
 8. Backlight: White(4*Led), ILed=60Ma, Vled=3.0V
 9. Connector: FPC
 10. Utteriorly Tolerance: ±0.2MM



深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
160*160 DOTS

Dwg: CUSTOMER

Material No.

Check: MODULE

SCALE: 1:1

Visual Angle



SHEET 1 OF 1