

Outline Drawing

客户确认签名
Customer approved

日期
Date

122±0.50

115±0.50

105.2±0.50


99±0.50

94.92(A.A)

P2.54X(8-1)=17.78

16-±1.00

VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2006/08/24	YOYO
B	改用LCI7066-02	2010/06/20	tw
C			


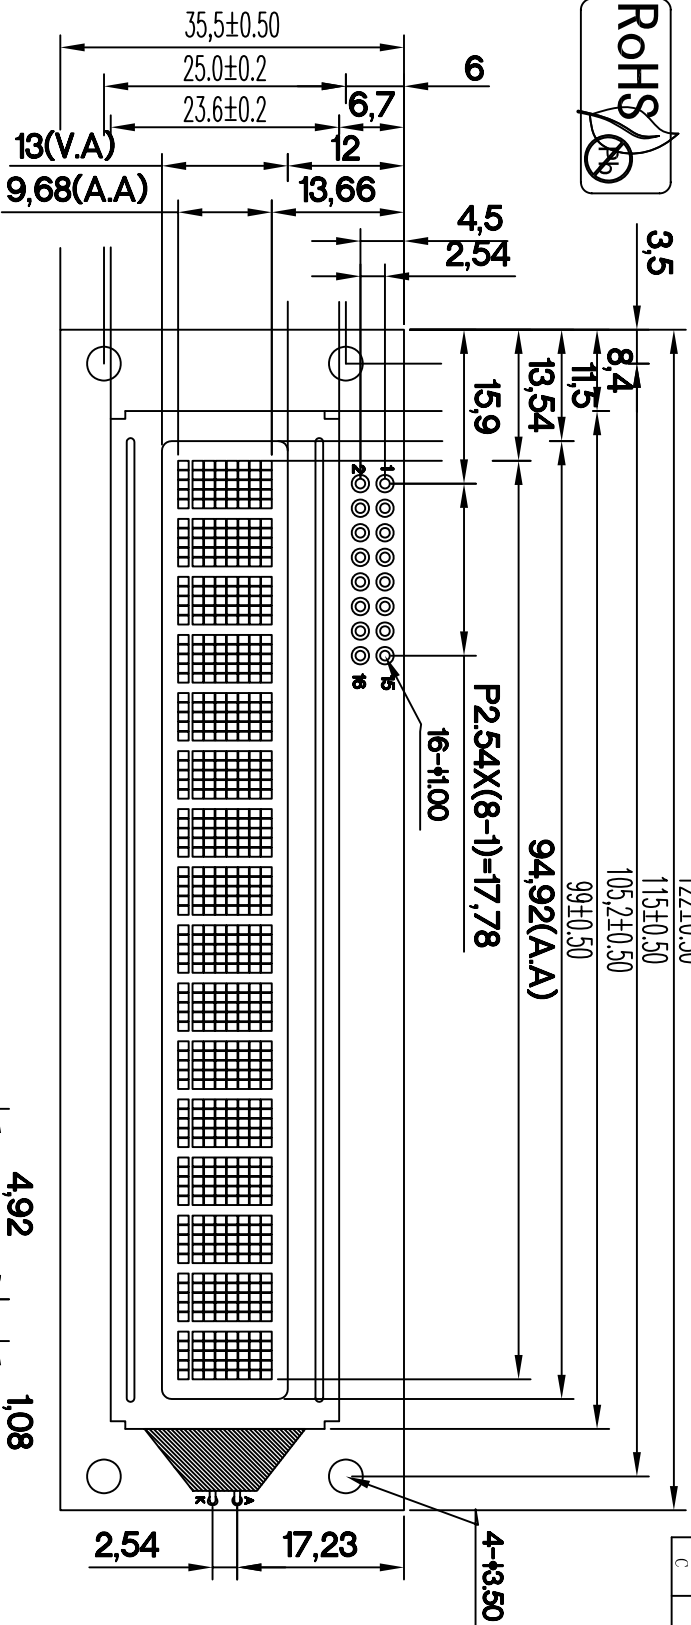


INTERFACE PIN CONNECTOR

PIN NO	1	2	3	4	5	6	7	8
SYMBOL	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN NO	9	10	11	12	13	14	15	16
SYMBOL	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

NOTE

- 1.Lcd Display Type:STN/Blue
- 2.Polarzier Mode:Transmissive,Negative
- 3.Viewing Direction: 6:00
- 4.Drive Method:1/5Bias,1/16Duty
- 5.Logic Supply Voltage: 3.3V
- 6.LCD Driving Voltage: 4.5V
- 7.Operating Temp:-20 TO 70°C
- 8.Storage Temp: -30 TO 80°C
- 9.Control IC: Uci7066-02(E/EU FONT, COB)
- 10.Backlight: White, Vled=3.3V
- 11.Connector:
- 12.Ulteriorly Tolerance:±0.2MM

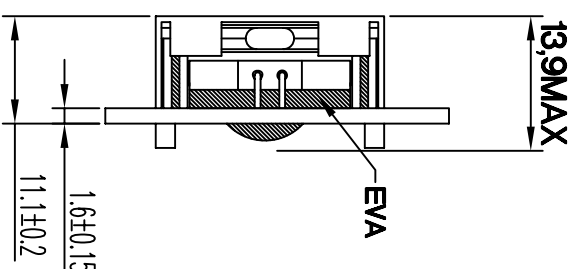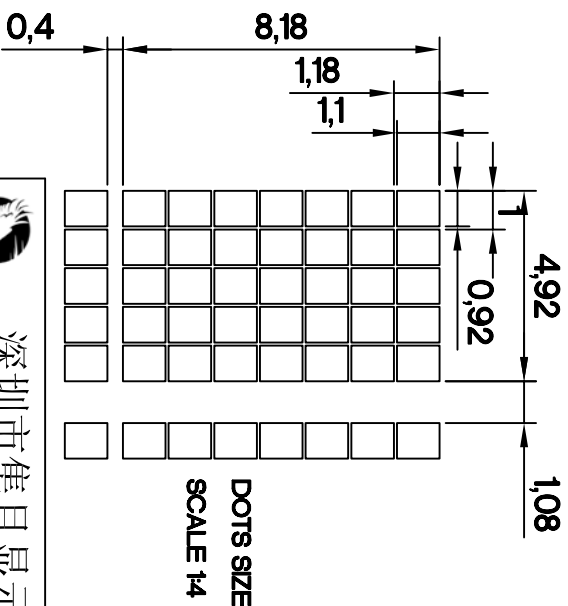

深圳市集目显示技术有限公司



Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE

16*1 CHARACTERS

Material No.

Dwg: CUSTOMER

Check: MODULE LMC16104BWM-02B

SCALE: 1:1

Visual Angle



SHEET 1 OF 1