
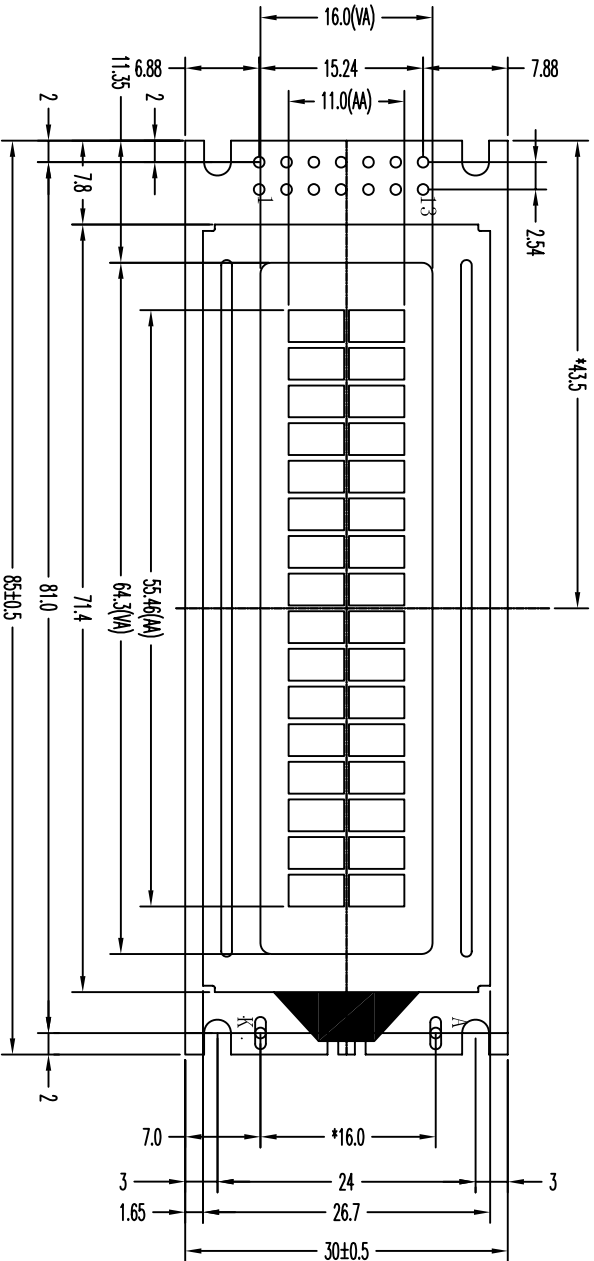


Outline Drawing

客户确认签名
Customer approved

日期
Date

VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2009/06/06	YOYO
B	在CI 6208GW-0B1基础上更改PCB定位孔, 重新编号	2020/10/20	jwh
C	改用ATP310661-003	2020/11/15	jwh

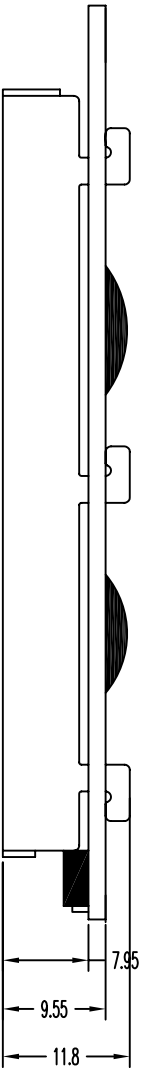

PINS DESCRIPTION

PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7-14	DB0-DB7

NOTE

- 1.Lcd Display Type:STN/GRAY
- 2.Polarzier Mode:Transflective,Positive
- 3.Viewing Direction: 6:00
- 4.Drive Method:1/5Bias,1/16Duty
- 5.Logic Supply Voltage: 5.0V
- 6.LCD Driving Voltage: 4.8V
- 7.Operating Temp:-20 TO 70°C
- 8.Storage Temp: -30 TO 80°C
- 9.Control IC: Alps1066L-003(EN/EU FONT,COB)
- 10.Backlight: Yellow-green,Vled=3.3V
- 11.Connector:
- 12.Ultiorly Tolerance:±0.2MM



深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
16*2 CHARACTERS

Dwg:

CUSTOMER

Material No.

Check:

MODULE LMC16208GWY-02C

SCALE: 1:1

Visual Angle



SHEET 1 OF 1