




VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2020/09/30	ZHMO
B			
C			

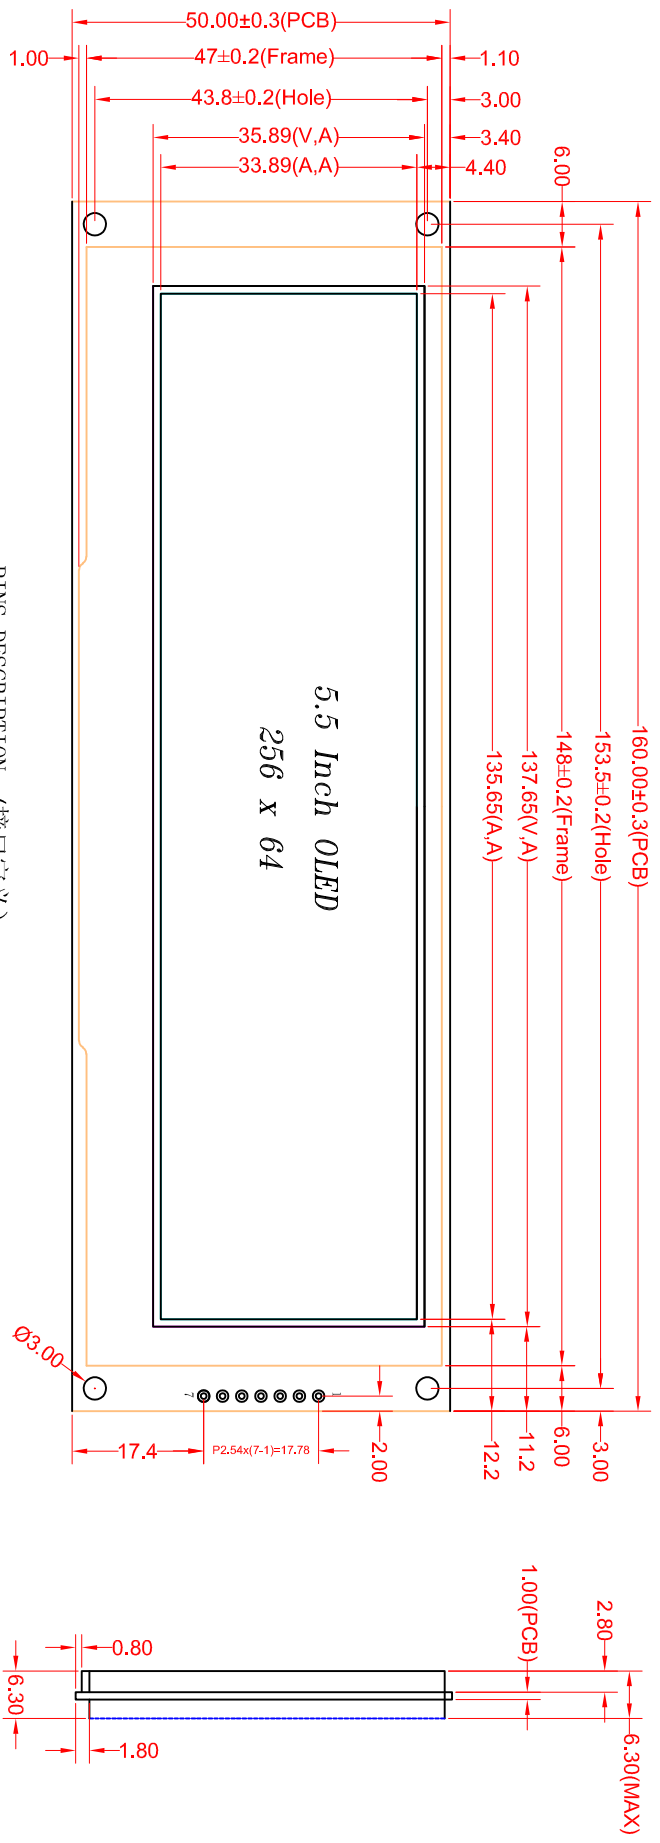

PINS DESCRIPTION (接口定义)

PIN	SYMBOL	FUNCTION
1	GND	GROUND (逻辑地)
2	VCC	POWER SUPPLY PIN (逻辑电源:3.3V/5.0V)
3	SCLK	SERIAL CLOCK (串口时钟信号)
4	SDA	SERIAL DATA (串口数据信号)
5	RES	RESET (复位信号)
6	DC	COMMAND AND DATA SELECT (命令数据选择)
7	CS	CHIP SELECT (片选信号, 低电平有效)

EVD550BMTSSG01
EV---Company Code
D---OLED
550---Panel size 5.5 inch
B---Serial No. A-Z
M---Module: P---Panel
7---Interface pin
S---SPI Interface
G---Display color: White/Blue/Green/Yellow
01---Ver. No.

NOTE

1. Display Type: 5.5" PM-OLED, 256x64
2. Viewing Direction: ALL
3. Logic Supply Voltage: 3.0V(SSD1322), VCC=3.3V OR 5.0V
4. OLED Panel driving voltage: 12.6V
5. Control IC: SSD1322U
6. Display color: Green
7. Operating Temp: -40 TO 80
8. Storage Temp: -40 TO 90°C
9. Ulteriorly Tolerance: ±0.2MM

深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

Dwg:		CUSTOMER	
Check:		MODULE	EVD550BMTSSG01
Dim:	MM	Visual Angle	

LCM TYPE: 5.5" H¹ OLED

Material No.

SCALE: 1:1

SHEET 1 OF 1