


Outline Drawing

客户确认签名
Customer approved

日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2020/10/09	ZHMO
B			
C			

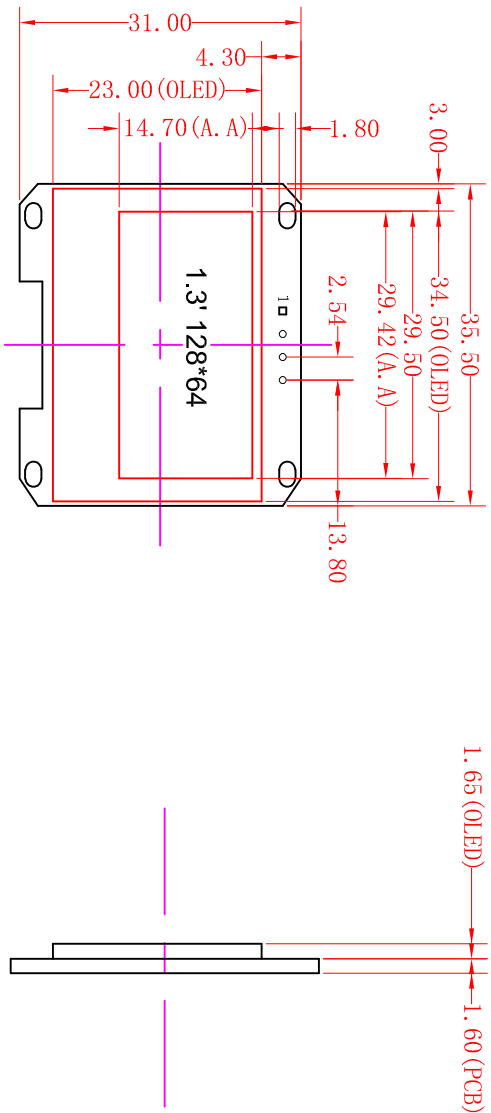

PINS DESCRIPTION (接口定义)

PIN SYMBOL	FUNCTION
1 GND	GROUND (逻辑地)
2 VCC	POWER SUPPLY PIN (逻辑电源正:3.3V/5.0V)
3 SCLK	SERIAL CLOCK (串口时钟信号)
4 SDA	SERIAL DATA (串口数据信号)

EVD242IM7DW01
EV---Company Code
D-----OLED
130---Panel size 1.3 inch
E-----Serial No. A-Z
M-----Module: P--Panel
4-----Interface pin
I-----IIC Interface
W-----Display color: White/Blue
01-----Ver. No.

NOTE

1. Display Type: 1.3' PM-OLED, 128x64
2. Viewing Direction: ALL
3. Logic Supply Voltage: 3.0V(SSD1306), VCC=3.3V OR 5.0V
4. OLED Panel driving voltage: 12.5V
5. Control IC: SSD1306/SH1106
6. Display color: White
7. Operating Temp: -20 TO 70
8. Storage Temp: -30 TO 80 °C
9. Ulteriorly Tolerance: ±0.2MM



深圳市隼目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

Dwg:	CUSTOMER	LCM TYPE
Check:	MODULE	1.3 1H OLED
Dim: MM	Visual Angle	Material No.
		SCALE: 1:1
		SHEET 1 OF 1