



Outline Drawing

客户确认签名
Customer approved

日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2021/03/12	ZHAO
B			
C			

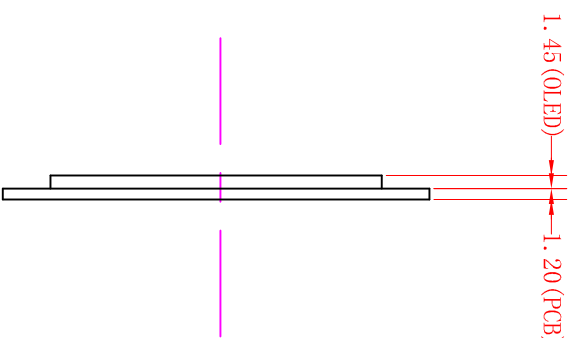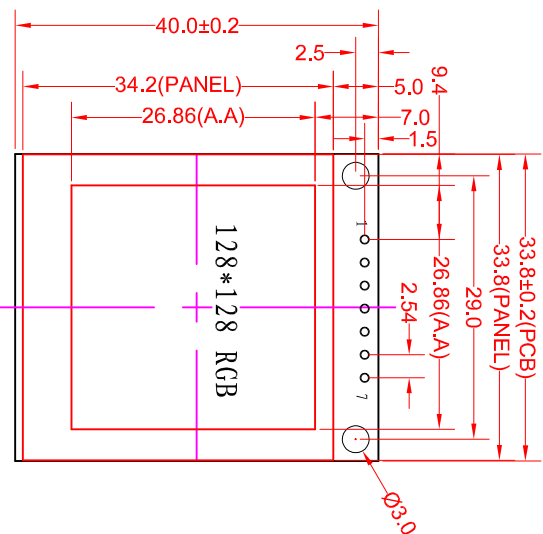

PINS DESCRIPTION (接口定义)

PIN	SYMBOL	FUNCTION
1	GND	GROUND (逻辑地)
2	VCC	POWER SUPPLY PIN (逻辑电源正3.3V/5.0V)
3	SCLK	SERIAL CLOCK (串口时钟信号)
4	SDA	SERIAL DATA (串口数据信号)
5	RES	RESET (复位信号)
6	DC	COMMAND AND DATA SELECT (命令数据选择)
7	CS	CHIP SELECT (片选信号, 低电平有效)

NOTE

1. Display Type: 1.5" PM-OLED, 128x128RGB
2. Viewing Direction: ALL
3. Logic Supply Voltage: 3.0V(SSD1351), VCC=3.3V OR 5.0V
4. OLED Panel driving voltage: 16.0V
5. Control IC: SSD1351
6. Display color: RGB
7. Operating Temp: -30 TO 80
8. Storage Temp: -40 TO 85°C
9. Ulteriorly Tolerance: ±0.2MM

EVD150EM7SR01
EV---Company Code
D---OLED
150---Panel size 1.5 inch
E---Serial No. A-Z
M---Module: P--Panel
7---Interface pin
S---SPI Interface
R---Display color: RGB
01---Ver. No.



深圳市隼目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
1.5 吋 OLED

Material No.

Dwg:


CUSTOMER

Check:

MODULE

Dim: MM

Visual Angle



SHEET 1 OF 1

EVD150EM7SR01

SCALE: 1:1