



Outline Drawing

客户确认签名
Customer approved

日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2020/12/19	ZHMO
B			
C			

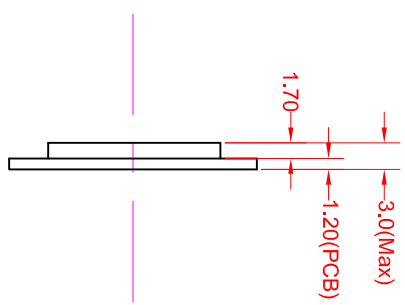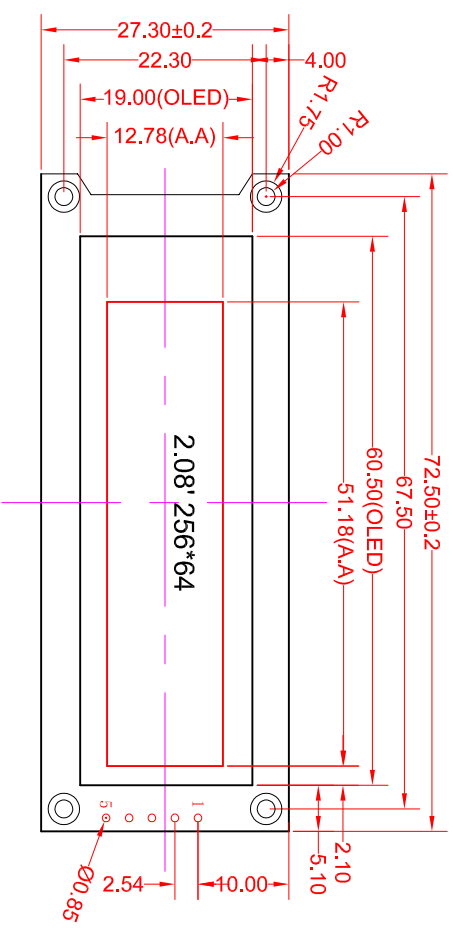

PINS DESCRIPTION (接口定义)

PIN	SYMBOL	FUNCTION
1	GND	GROUND (逻辑地)
2	VCC	POWER SUPPLY PIN (逻辑电源正: 3.3V/5.0V)
3	SCLK	SERIAL CLOCK (串口时钟信号)
4	SDA	SERIAL DATA (串口数据信号)
5	RES	RESET (复位信号)

NOTE

1. Display Type: 2.08' PM-OLED, 256x64
2. Viewing Direction: ALL
3. Logic Supply Voltage: 3.0V(SH1122), VCC=3.3V OR 5.0V
4. OLED Panel driving voltage: 12.5V
5. Control IC: SH1122
6. Display color: White
7. Operating Temp: -40 TO 80
8. Storage Temp: -40 TO 85°C
9. Ulteriorly Tolerance: ±0.2MM

EVD208BM5IW01
EV---Company Code
D-----OLED
208---Panel size 2.08 inch
B-----Serial No. A-Z
M-----Module: P--Panel
5-----Interface pin
I-----IIC Interface
W-----Display color: White/Blue/Green
01----Ver. No.



深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

LCM TYPE
2.08吋 OLED
Material No.

Dwg:	CUSTOMER		
Check:	MODULE	EVD208BM5IW01	SCALE: 1:1
Dim:	MM	Visual Angle	SHEET 1 OF 1