




Outline Drawing

客户确认签名
Customer approved

日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2018/07/15	CGP
B			
C			

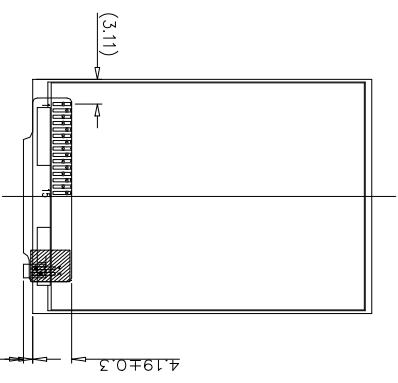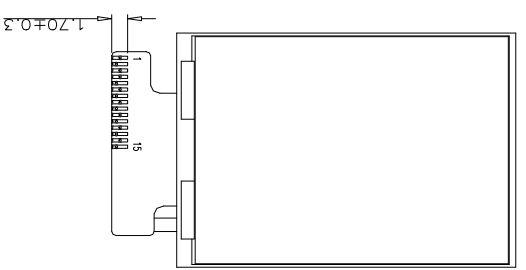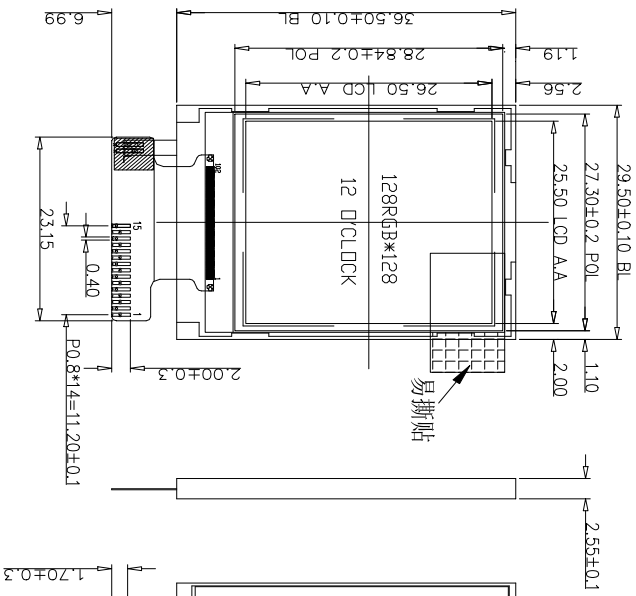


1	LPTE
2	GND
3	CS
4	A0
5	SCK
6	SDA
7	RESET
8	DVDD1.8V
9	IOVDD2.8V
10	LED-
11	LED+
12	YM\NC
13	XP\NC
14	YP\NC
15	XM\NC

弯折示意图
FPC 产品展开出货

NOTE

1. Lcd Display Type: 1.44TFT, 128*128, TN
2. Polarizer Mode: Transmissive, normally white
3. Viewing Direction: 12'CLOCK
4. Logic Supply Voltage: 3.0V
5. Control IC: ST7735S
6. Backlight: White(2*Led), Iled=30Ma, Vled=3.0V
7. Backlight brightness and uniformity: 280cd/m2, >=80%
8. Operating Temp: -10 TO 60°C
9. Storage Temp: -20 TO 70°C
10. Connector: FPC
11. Ulteriorly Tolerance: ±0.2MM



深圳市集目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

Dwg:	CUSTOMER	LCM TYPE
Check:	MODULE	Material No.
Visual Angle	LMT0144BTN4S01	SCALE: 1:1
		SHEET 1 OF 1