



Outline Drawing

客户确认签名
Customer approved


日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2019-06-18	LT
B			
C			

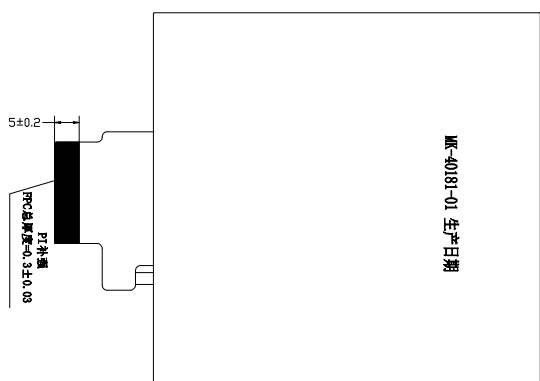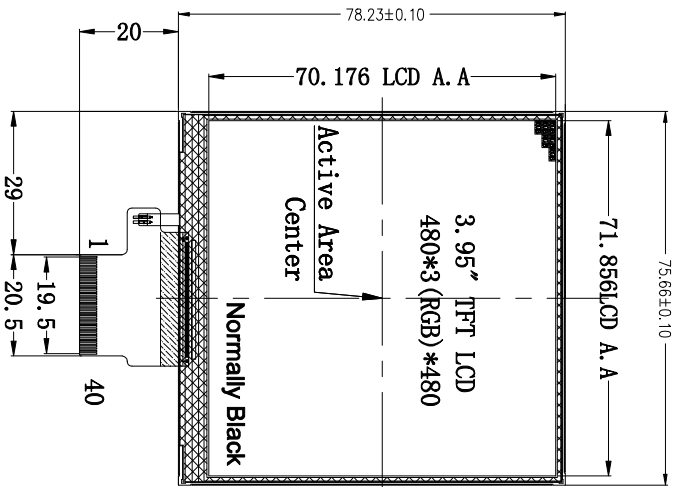

PIN	SYMBLE	PIN	SYMBLE
1	LEDK	21	B0
2	LEDA	22	B1
3	GND	23	B2
4	VCI (3.3V)	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	PCLK
11	R6	31	NC/DISP
12	R7	32	HSYNC
13	G0	33	VSYNC
14	G1	34	DE
15	G2	35	SD0
16	G3	36	GND
17	G4	37	RESET
18	G5	38	SDA
19	G6	39	SCL
20	G7	40	CSB



Iled=40mA, Vled=1.5.5V

- NOTE
- 1.Lcd Display Type:3.95 Inch,480*480,IPS
 - 2.Polarizer Mode:Transmissive, normally white
 - 3.Viewing Direction: ALL
 - 4.Logic Supply Voltage: 3.3V
 - 5.Control IC: ST7701S
 - 6.Backlight: White (5*2 LED,Iled=40mA,Vled=1.5.5V)
 - 7.Backlight brightness and uniformity: 200cd/m2
 - 8.Operating Temp: -20 TO 70
 - 9.Storage Temp: -30 TO 80 °C
 - 10.Connector: FPC
 - 11.Ulteriorly Tolerance:±0.2MM

<p>深圳市单目显示技术有限公司 Shenzhen Eagle Vision Display Technology Co., Ltd</p>		LCM TYPE	
Dwg:	CUSTOMER	Material No.	
Check:	MODULE	EVT040BIW40R01	
Dim: MM	Visual Angle	SCALE: 1:1	SHEET 1 OF 1