



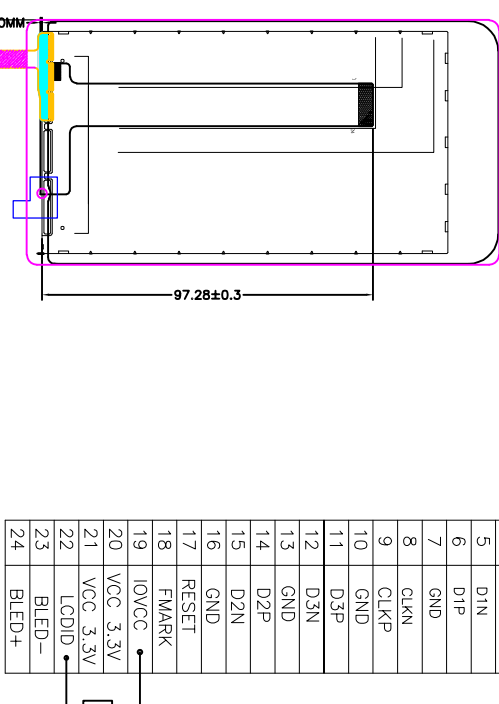

VER	REVISION	RECORD	Date	Name
A	NEW	RELEASE	2021/06/03	LI
B				
C				

DIMENSION RANGE		尺寸范围			
Material	公差	材料			
A	0.05	0.10	0.15	0.20	0.30
B	0.10	0.15	0.20	0.25	0.30
UNLESS OTHERWISE SPECIFIED					
公差以上者优先, 默认取最大值					

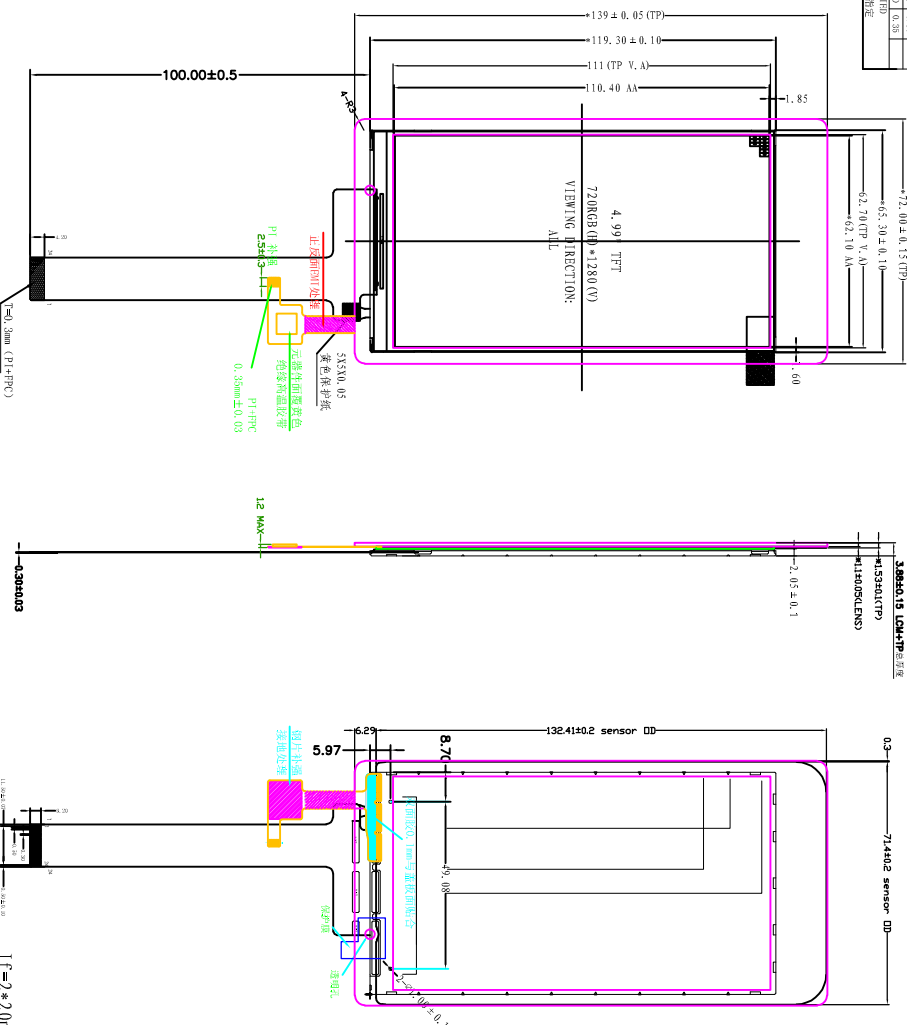

- 备注要求:**
- 要求做成2L及  
4L同时兼容
- CTP的PIN定义:**
- |   |     |
|---|-----|
| 1 | RST |
| 2 | INT |
| 3 | VGP |
| 4 | SCL |
| 5 | SDA |
| 6 | GND |
- TP 技术要求:**
- 1、结构类型:G++H+
  - 2、LENS材质为 康宁三代, 厚度1.1mm;
  - 3、IC型号:GT5688; 支持触点点数: 多点;
  - 4、工作条件:DC 2.8V~3.6V, IOVCC=1.8V;
  - 5、表面硬度->7H; 透光率:>86%;
  - 6、表面处理: 无; 达因值≥32 dynes/cm
  - 7、工作环境:-20℃~70℃;
  - 8、储存环境:-30℃~70℃;
  - 9、ESD 空气:±10KV;
  - 10、未标注公差:±0.20mm;
  - 11、标注 \* 尺寸为重点管控尺寸。

- NOTES:**
1. Display: 4.99" a-si TFT Transmissive mode
  2. Dot :720\*1280;
  3. VIEWING DIRECTION : IPS;
  4. Driver IC: IL19881D;
  5. STORAGE TEMPERATURE:-30° C TO 80° C, OPERATING TEMPERATURE:-20° C TO 70° C;
  6. BL LED:10 CHIP-WHITE LEDS, If=40mA ,LCM Brightness: 300cd/mm MIN;Color coordinates: X:0.300+/-0.03;Y:0.33+/-0.03
  - 7.\* CRITICAL DIMENSION;
  8. GENERAL TOLERANCE: ±0.2mm;
  9. RECOMMENDED CELLPHONE WINDOW SIZE: 0.5mm FROM LCD A. A AREA ;



**深圳市集目显示技术有限公司**  
Shenzhen Eagle Vision Display Technology Co., Ltd

Dwg:	CUSTOMER	Material No.
Check:	MODULE	SCALE: 1:1
Dim:	MM	SHEET 1 OF 1