



Outline Drawing

客户确认签名
Customer approved

日期
Date



VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2021/04/22	ZHAO
B			
C			

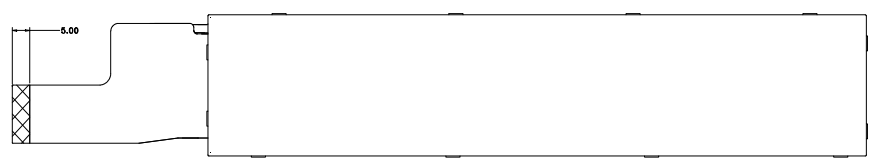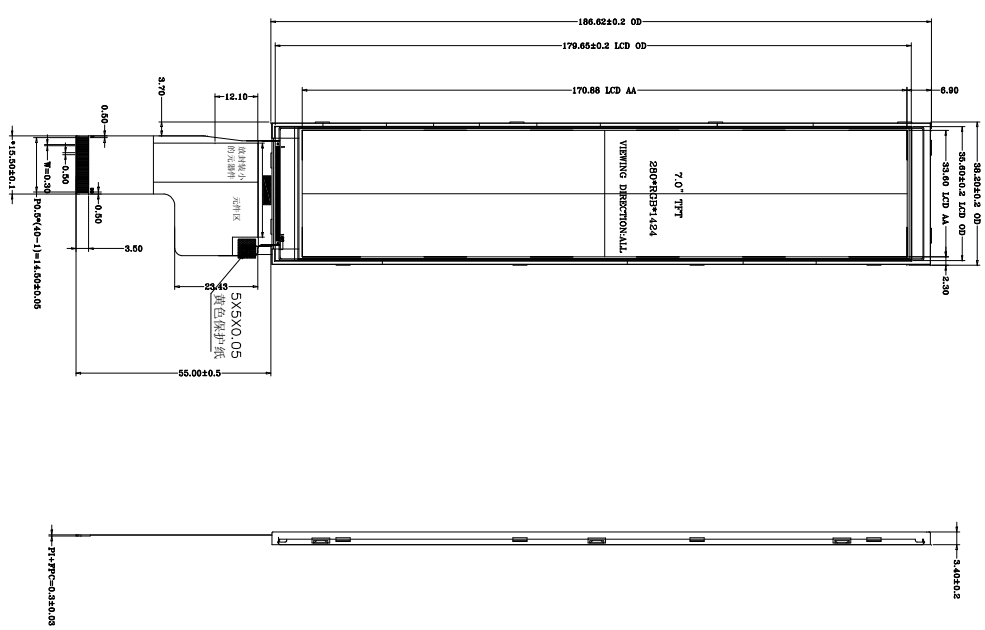


FPC弯折后示意图
FPC弯折出货

1	GND
2	DN3
3	DP3
4	GND
5	DN2
6	DP2
7	GND
8	CKN
9	CKP
10	GND
11	DN1
12	DP1
13	GND
14	DN0
15	DP0
16	GND
17	GND
18	TE
19	RESET
20	GND
21	VCI
22	VCI
23	VCI
24	GND
25	NC
26	LEDK
27	LEDK
28	LEDA
29	LEDA
30	LEDA

NOTE

1. Lcd Display Type: 7.0" TFT, 280*1424
2. Polarizer Mode: Transmissive, normally white
3. Viewing Direction: ALL
4. Logic Supply Voltage: 3.3V
5. Control IC:
6. Backlight: White(8*2 Led), Iled=40mA, Vled=24.0V
7. Backlight brightness and uniformity: 450cd/m2, >=80%
8. Operating Temp: -20 TO 80
9. Storage Temp: -30 TO 90°C
10. Connector: FPC
11. Uteriorly Tolerance: ±0.2MM

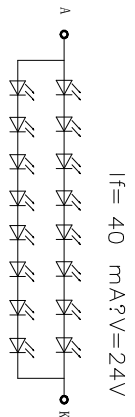

深圳市隼目显示技术有限公司
Shenzhen Eagle Vision Display Technology Co., Ltd

Dwg:	CUSTOMER	LCM TYPE	7.0吋 TFT
Check:	MODULE	Material No.	
Part No.	EVT070HIW30MP01	SCALE: 1:1	
	Visual Angle	SHEET 1 OF 1	