

# Outline Drawing




客户确认签名  
Customer approved

日期  
Date




VER	REVISION RECORD	Date	Name
A	NEW RELEASE	2021/10/09	ZHAO
B			
C			

NO.	PING-NAME
1	VLED+
2	VLED+
3	LCD_VGH
4	LCD_VGL
5	UP/DN
6	SH/LR
7-8	VLED-
9	AVDD
10	GND
11	MP-TDP3
12	MP-TDN3
13	GND
14	MP-TDP2
15	MP-TDN2
16	GND
17	MP-CLKP
18	MP-CLKN
19	GND
20	MP-TDP1
21	MP-TDN1
22	GND
23	MP-TDP0
24	MP-TDN0
25	GND
26	STBYB
27	REST
28-29	VDD
30	VCOM

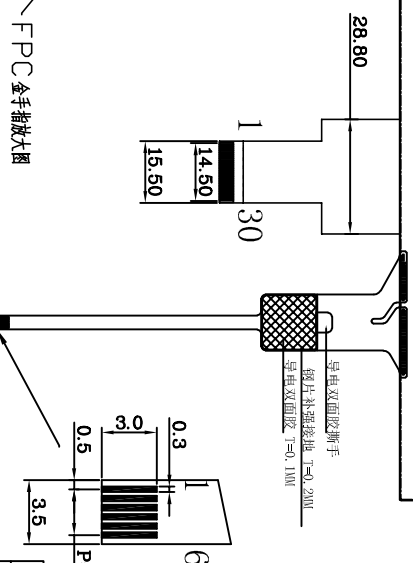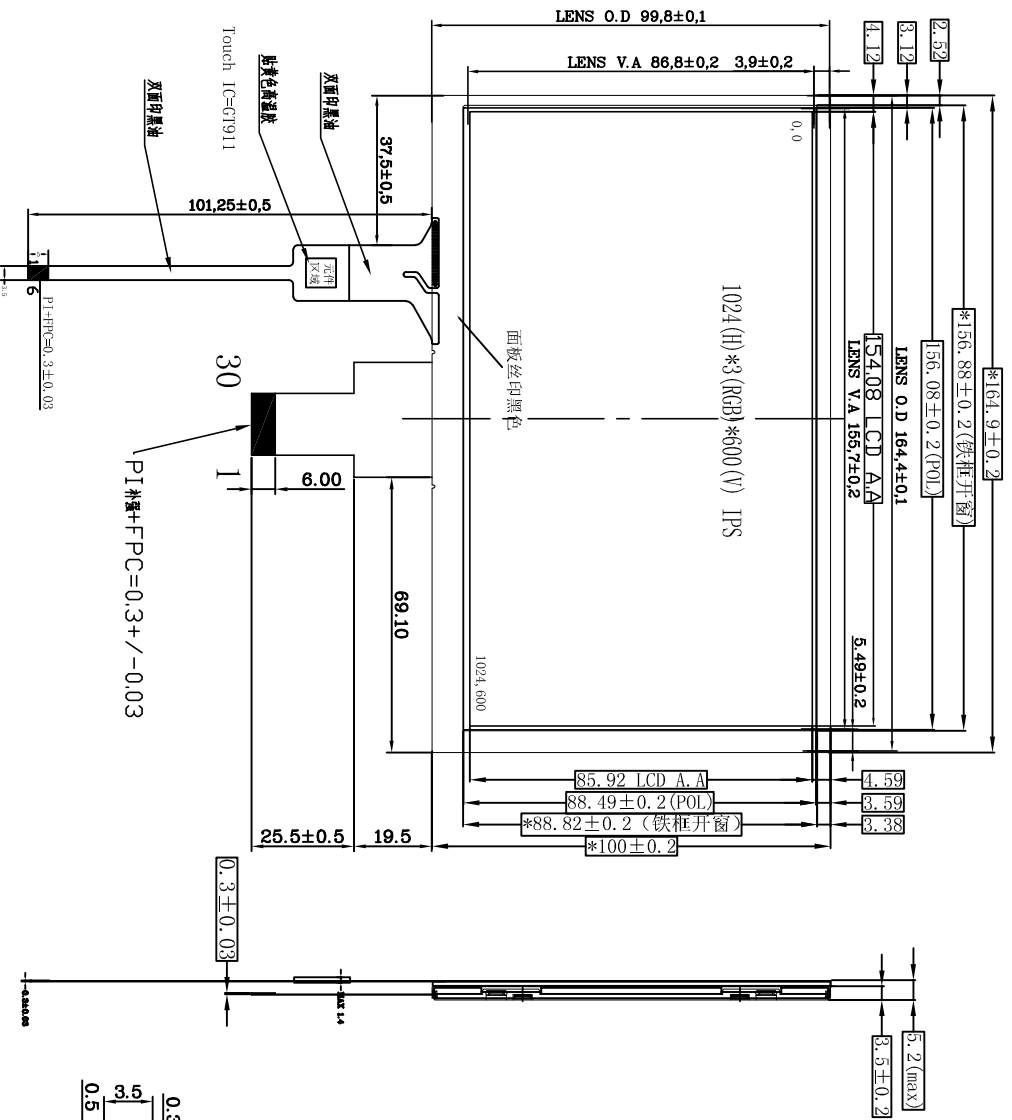

- NOTE
- 1.Lcd Display Type: 7.0TFT, 1024\*600,IPS
  - 2.Polarizer Mode:Transmissive, normally black
  - 3.Viewing Direction: ALL
  - 4.Logic Supply Voltage: 3.0V
  - 5.Control IC: EK79007A+EK73217A
  - 6.Backlight: White(3\*9 Led),ILED=180mA,Vled=9.6-10.0V
  - 7.Backlight brightness and uniformity: 350cd/m2, >=80%
  - 8.Operating Temp: -20 TO 70
  - 9.Storage Temp: -30 TO 80°C
  - 10.Connector: FPC
  - 11.Ulteriorly Tolerance:±0.2MM

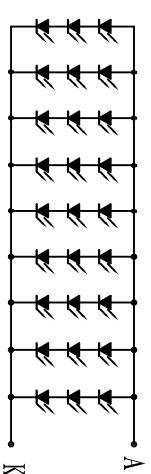

Pin#	Assignment
1	Shutdown
2	VCC
3	GND
4	IN+
5	SDA
6	SCI

深圳市集目显示技术有限公司  
Shenzhen Eagle Vision Display Technology Co., Ltd

Dwg:	CUSTOMER	LCM TYPE	7.0 In <sup>2</sup> TFT+CTP
Check:	MODULE	Material No.	
Dim:	MM	Visual Angle	
		SCALE: 1:1	
		SHEET 1 OF 1	